

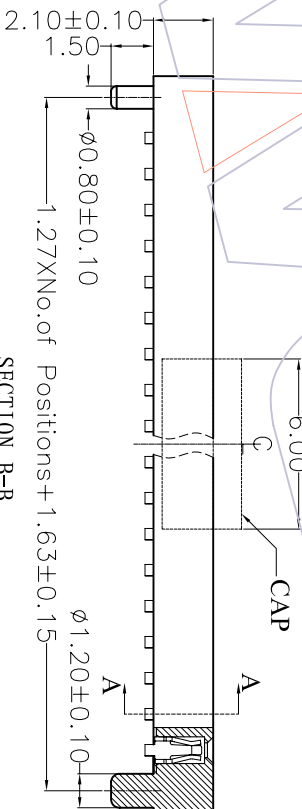
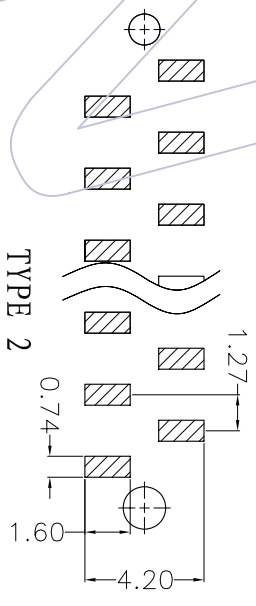
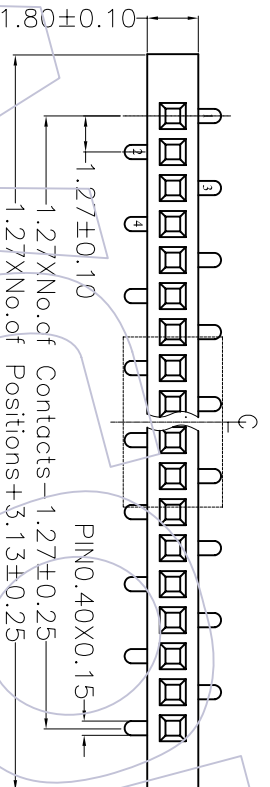
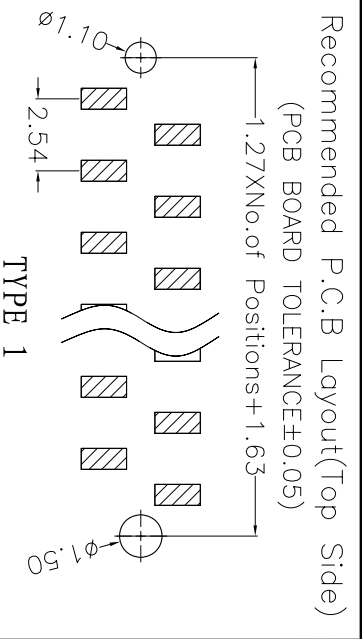


# HSP

**NOTES:**

Current Rating: 1.0AMP  
 Withstand Voltage: 500V AC/DC  
 Contact Resistance: 20mΩ Max  
 Insulation Resistance: 1000MΩMin  
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze  
 Contact plating: Au or Sn over Ni  
 Insulator Material: PA6T+30%G. F UL94V-0

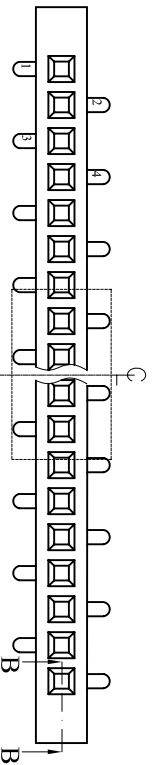

## Ordering Information

2321 - 1 XX M XX CUNT X

No. of Pins per ROW: 02-50PIN

Contact Plating:  
 GR=Gold Finish  
 G1=3μ Gold  
 G2=5μ Gold  
 G3=10μ Gold  
 G4=5μ Gold  
 G5=30μ Gold  
 SR=Gold Plating  
 S1=3μ Gold/Tin  
 S2=5μ Gold/Tin  
 S3=10μ Gold/Tin  
 S4=5μ Gold/Tin  
 S5=30μ Gold/Tin  
 SN=Tin

Packing:  
 T=Tube  
 R=Reel  
 P=Tube+CAP  
 3=TYPE 1  
 4=TYPE 2

Series No.

SECTION B-B

SECTION A-A

TITLE	PART NO.
TYPE 1	2321-1XXMXXCUNT3
TYPE 2	2321-1XXMXXCUNT4

REV	DATE	MODIFICATION DESCRIPTION
A0	08/02/14	NEW

OPERATION	DRAW
XX ±0.40	DRAW
XX ±0.25	DESIGN
X.XXX ±0.15	CHECK
Angle ± 3°	CHECK
DIM TOL	APPROVE

SCALE	UNIT	PART NO.
3:1	mm	WCON 维峰五金电子有限公司
A4	mm	WAVE HARDWARE ELECTRONICS CO. LTD
1/1	mm	SHEET
1/1	mm	SHEET
PROJ.	mm	Customer NO.

**WCON** 维峰五金电子有限公司  
 WAVE HARDWARE ELECTRONICS CO. LTD

SEE TABLE  
 1.27mm SINGLE FEMALE HEADER SMT H=2.10  
 WITH DIFFERENT POST