





HSP

NOTES:

Current Rating: 1.0AMP
 Withstand Voltage: 500V AC/DC
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩMin
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au or Sn over Ni
 Insulator Material: PA6T+30%G. F UL94V-0

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

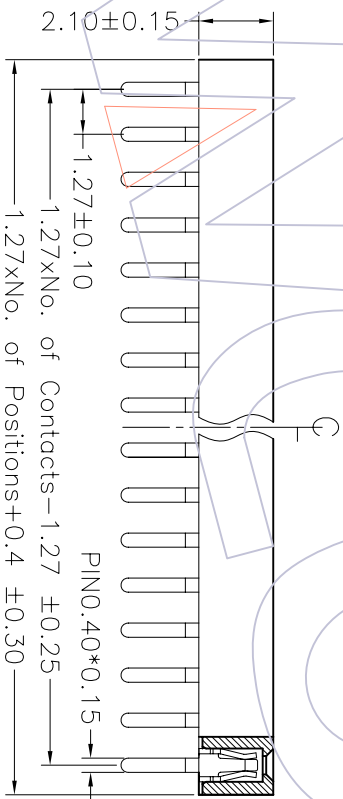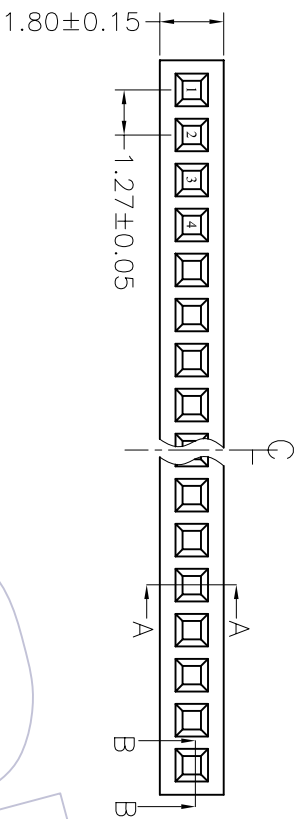

Ordering Information

2321 - 1 XX S XX CUNT 1

No. of Pins per ROW: 02-50Pin
 Contact Plating: G=Gold Flash
 GI=3μ"Gold
 G2=5μ"Gold
 G3=10μ"Gold
 G4=15μ"Gold
 G5=30μ"Gold
 S0=Gold Flash/Tin
 S1=3μ"Gold/Tin
 S2=5μ"Gold/Tin
 S3=10μ"Gold/Tin
 S4=15μ"Gold/Tin
 S5=30μ"Gold/Tin
 SN=Tin

SECTION B-B

SECTION A-A

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	SCALE	PART NO.	TITLE:
A0	08/02/14	NEW			X.X ±0.40	DESIGN	3:1	2321-1XXSXXCUNT1	1.27mm SINGLE FEMALE HEADER 180° H=2.10
					X.XX ±0.25	CHECK	mm		
					X.XXX ±0.15		A4		
					Angle ± 3'	APPROVE	1/1		
					DIM	PROJ.	☐	Customer NO.	

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO.,LTD