
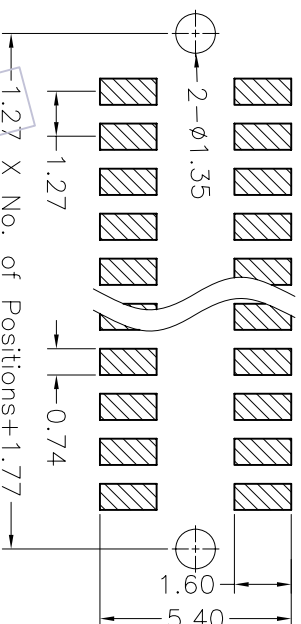


NOTES:

Current Rating: 1.0AMP
Withstd Voltage: 500V AC/DC
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩMin
Operation Temperature: -40°C to +105°C
Contact Material: Phosphor Bronze
Contact plating: Au or Sn over Ni
Insulator Material: PA6T+30%G.F UL94V-0

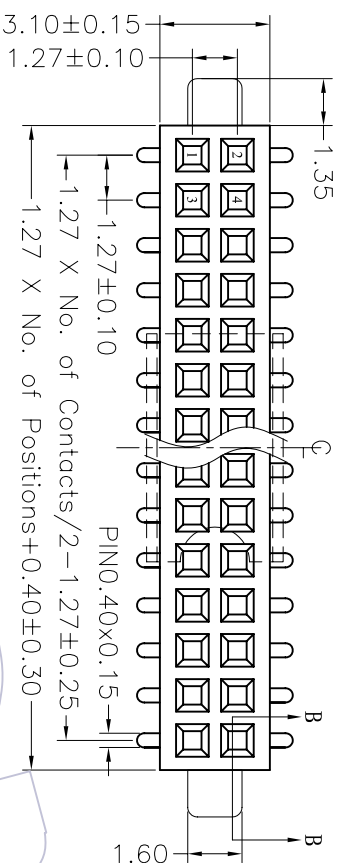


Ordering Information


2321 - 2 XX M XX C U N T X

No. of Pins per ROW: 02-50Pin
Contact Plating: G=Gold Flash
GI=3µ"Gold
G3=5µ"Gold
G4=10µ"Gold
G5=15µ"Gold
G6=30µ"Gold
S0=Gold Flash/Tin
S1=3µ"Gold/Tin
S2=5µ"Gold/Tin
S3=10µ"Gold/Tin
S4=15µ"Gold/Tin
S5=30µ"Gold/Tin
SN=Tin


Packaging:
T=Tube
R=Reel
C=CAP
P=Tube+CAP

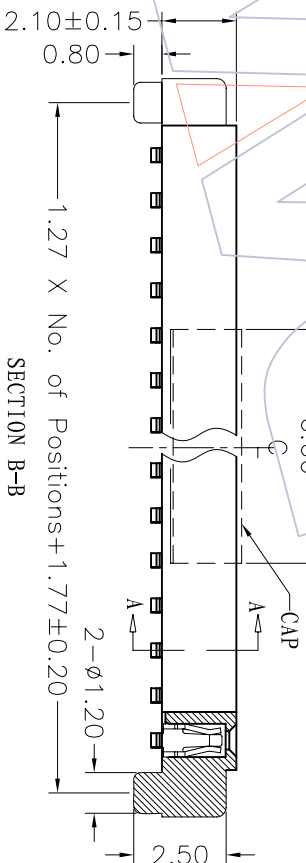

SECTION B-B

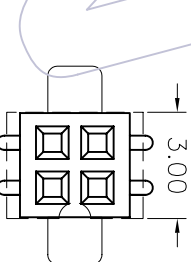

special cap for 2*2pin

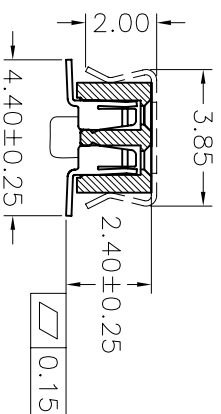

SECTION A-A

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		DRAW		SCALE		PART NO.	TITLE:	PROJ.	Customer NO.
					XXX	±0.40	DESIGN	UNIT	3:1					
A0	08/02/16	NEW			XXX	±0.25	CHECK	A4	mm	1/1	2321-2XXMXXCUNT X	1.27mm DIA. FEMALE HEADER SMT H=2.10 WITH OUTSIDE POST		
1					Angle	± 3'	APPROVE							

WCON 维峰五金电子有限公司
WAVE HARDWARE ELECTRONICS CO.,LTD