

HSF

NOTES:

Current Rating: 1.0AMP
 Withstand Voltage: 500V AC/DC
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩMin
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au or Sn over Ni
 Insulator Material: Pk6T+30%G, F UL94V-0

Ordering Information


2334 - 2 XX S XX CUNT 1

No. of Pins per Row: 42=50PIN


Contact Plating:
 G0=Gold Flash
 G1=3μ"Gold
 G2=5μ"Gold
 G3=10μ"Gold
 G4=15μ"Gold
 G5=30μ"Gold

Plating:
 T=Tube


S0=Gold Flash/Tin
 S1=3μ"Gold/Tin
 S2=5μ"Gold/Tin
 S3=10μ"Gold/Tin
 S4=15μ"Gold/Tin
 S5=30μ"Gold/Tin
 SN=Tin

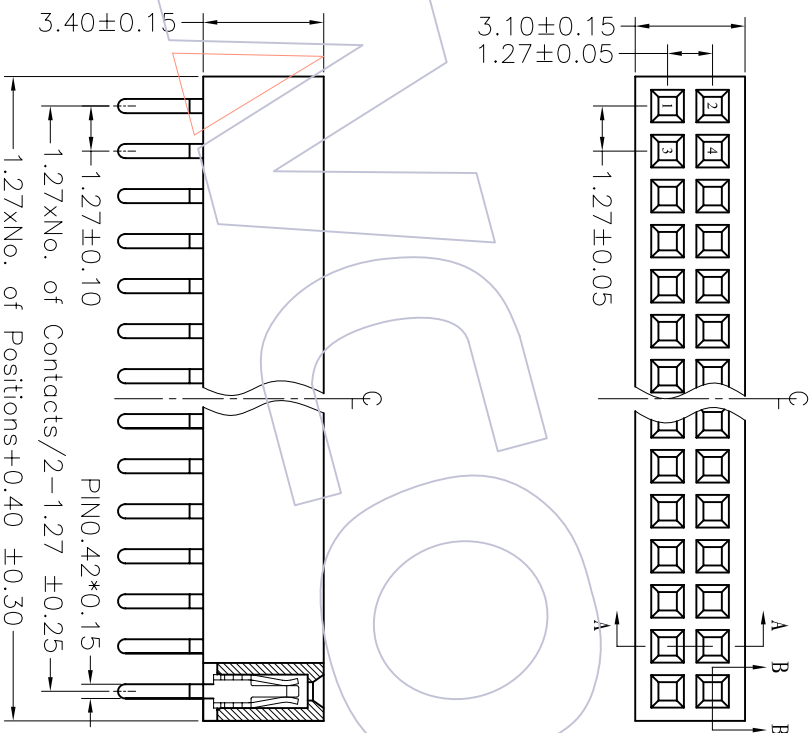

SECTION B-B

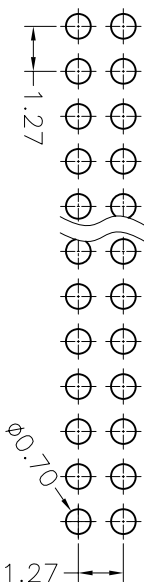

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)



SECTION A-A

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		DRAW		SCALE		PART NO.	TITLE:
					Angle	± 3'	DESIGN	CHECK	UNIT	mm		
A0	08/02/14	NEW			XXX	±0.40			3:1		2334-2XXSXXCUNT1	FHL 27 DUAL H=3.4 180°
					XXX	±0.25						
					XXXX	±0.15						
					Dim	TOL	APPROVE					

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO.,LTD