

HSP

NOTES:

Current Rating: 1.0AMP
 Withstand Voltage: 500V AC/DC
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩMin
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au or Sn over Ni
 Insulator Material: PA6T+30%G.F UL94V-0

Ordering Information



2321 - 2 XX S XX CUNT 1

No. of Pins per Row: 40=50PIN


Contact Plating:
 Co=Gold Flash
 G1=3μ"Gold
 G2=5μ"Gold
 G3=10μ"Gold
 G4=15μ"Gold
 G5=30μ"Gold

Packing:
 T=Tube


SP=Gold Flash/Tin
 S1=3μ"Gold/Tin
 S2=5μ"Gold/Tin
 S3=10μ"Gold/Tin
 S4=15μ"Gold/Tin
 S5=30μ"Gold/Tin
 SN=Tin

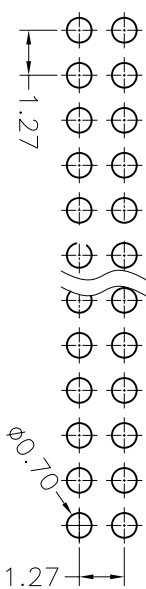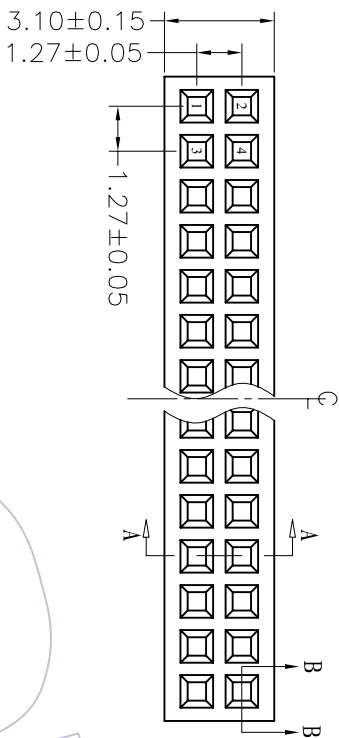

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

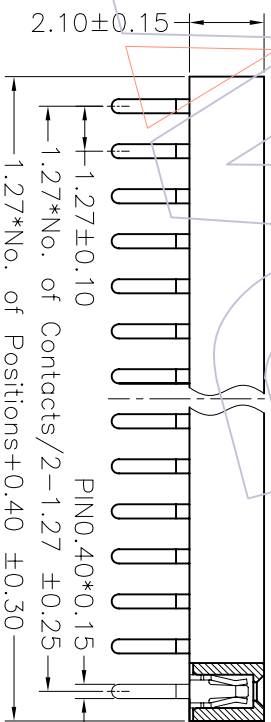

SECTION B-B



SECTION A-A

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	SCALE	PART NO.	TITLE:
A0	08/02/16	NEW			XXX ±0.40 XXX ±0.25 XXX ±0.15	DESIGN CHECK	5:1 mm A4	2321-2XXSXXCUNT1	1.27mm DUAL FEMALE HEADER 180° H=2.1
					Angle ± 3'	CHECK	UNIT mm		
					DIM	APPROVE	SIZE A4		
					TOL		SHEET 1/1		
							PROJ.		Customer NO.

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO.,LTD

2321-2XXSXXCUNT1

1.27mm DUAL FEMALE HEADER 180° H=2.1