




0.80mm Female Header, Dual Row

SPECIFICATIONS

Current Rating: 0.75AMP
 Contact Resistance: 15m Ω Max.
 Insulation Resistance: 1000M Ω Min.
 Withstanding Voltage : 500V AC/Minute
 Operation Temperature: -55°C to +125°C
 Contact Material: Phosphor Bronze
 Contact plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: LCP+30%GF

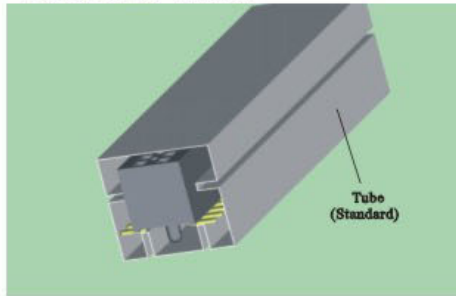

2631-2XXMXXDTNX1




2631-2XXMXXDTNX2

2631-2 XX M XX D TN X X

NO. OF PINS
 PER ROW
 02-50P

| CONTACT PLATING | |
|-----------------|------------------|
| G0:1u" Gold | S0:1u" Gold/Tin |
| G1:3u" Gold | S1:3u" Gold/Tin |
| G2:5u" Gold | S2:5u" Gold/Tin |
| G3:10u" Gold | S3:10u" Gold/Tin |
| G4:15u" Gold | S4:15u" Gold/Tin |
| G5:30u" Gold | S5:30u" Gold/Tin |
| G6:20u" Gold | S6:20u" Gold/Tin |
| | SN:Tin |

PACKING
 T:Tube
 R:Tape & Reel
 P:Tube+CAP

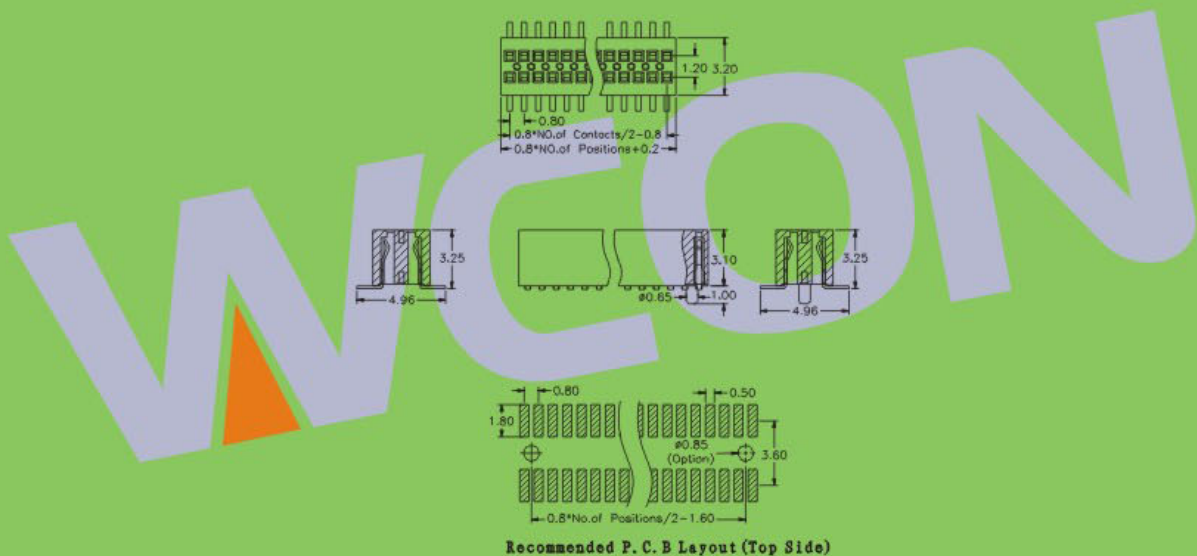

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418