

HSP

NOTES:

Current Rating: 1.0AMP
 Withstand Voltage: 500V AC/DC
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩMin
 Operation Temperature: -40°C to +105°C
 Contact Material: Phosphor Bronze
 Contact plating: Au or Sn over Ni
 Insulator Material: PA6T+30%G, F UL94V-0


Ordering Information

2344 - 2 XX M XX CUNT 3


No. of Pins per ROW: 42-50/PIN

Contact Plating:
 Co=Gold Flash
 GI=3μ"Gold
 G2=5μ"Gold
 G3=10μ"Gold
 G4=15μ"Gold
 G5=30μ"Gold
 SP=Gold Flash/Tin
 SI=3μ"Gold/Tin
 S2=5μ"Gold/Tin
 S3=10μ"Gold/Tin
 S4=15μ"Gold/Tin
 S5=30μ"Gold/Tin
 SN=Tin


Packing:
 T=Tube
 R=Tray&&Reel+CAP
 P=Tube+CAP

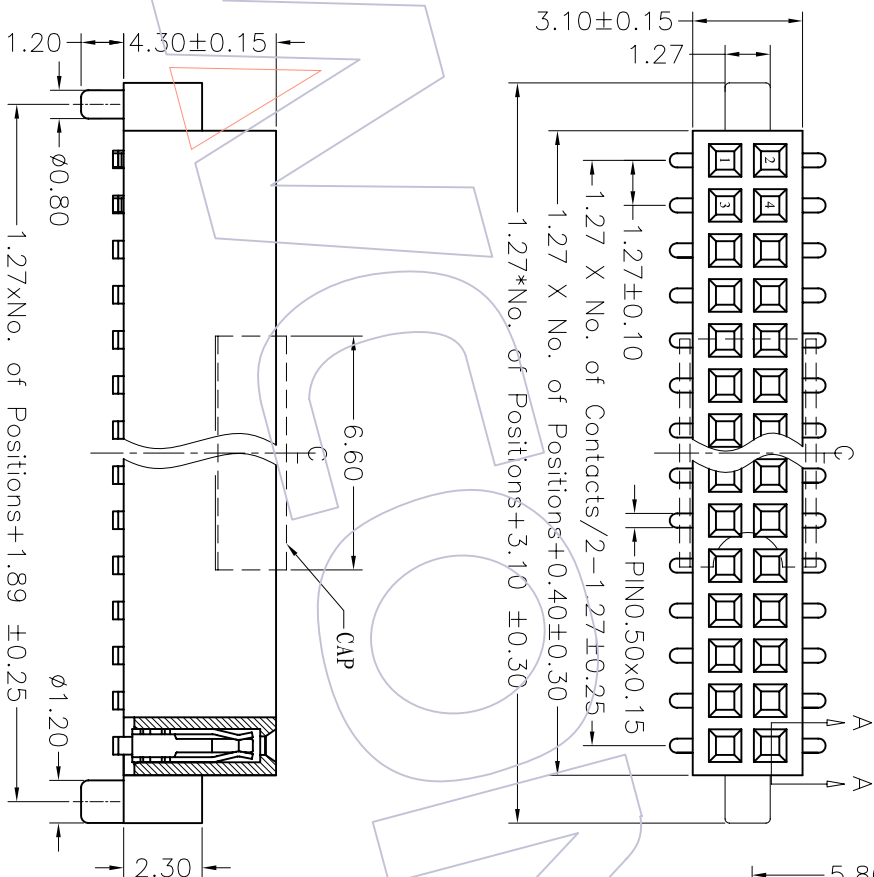

SECTION A-A

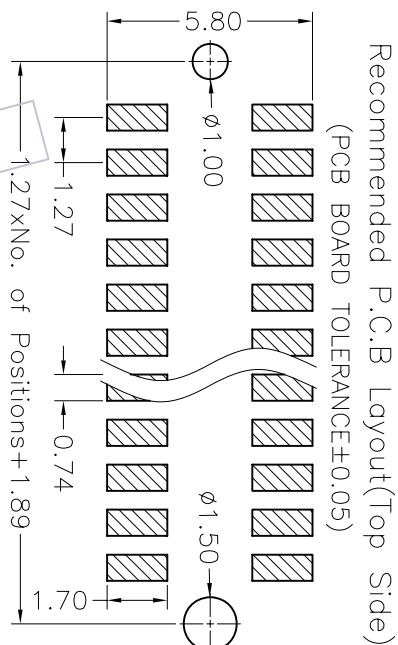

Special CAP for 2*2pin

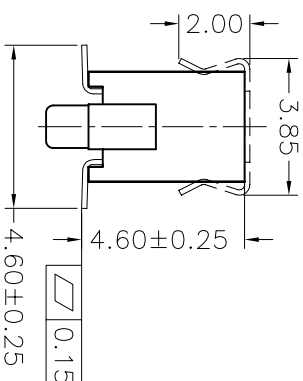

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	SCALE	PART NO.
A0	08/02/16	NEW			XXX XXX XXX	DESIGN CHECK	3:1 mm A4	2344-2XXMXXCUNT3
					Angle DIM	CHECK APPROVE	1/1	
					± 3'	PROJ.	Customer NO.	

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO.,LTD

FIG.1.27mm DIA. SWT H=4.30 WITH DIFFERENT POST