
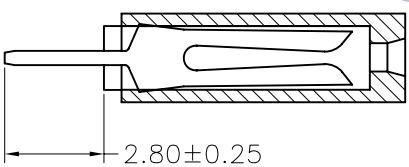
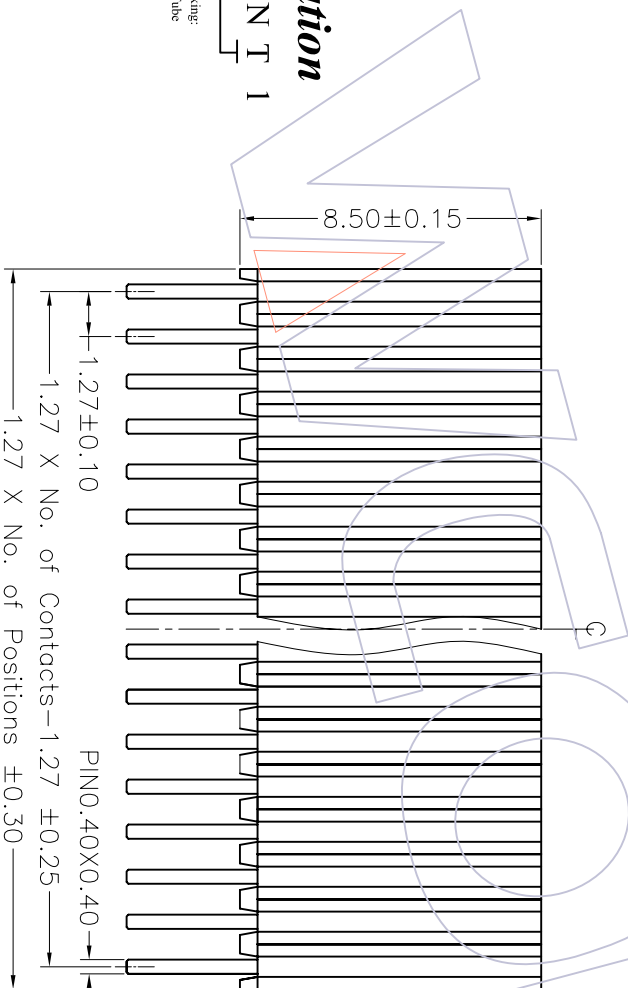
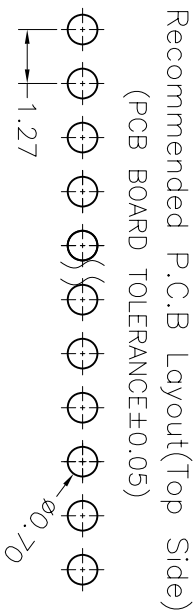


# HSP

NOTES:  
 Current Rating: 1.0AMP  
 Withstand Voltage: 500V AC/DC  
 Contact Resistance: 20mΩ Max  
 Insulation Resistance: 1000MΩMin  
 Operation Temperature: -40°C to +105°C  
 Contact Material: Phosphor Bronze  
 Contact plating: Au or Sn over Ni  
 Insulator Material: PA6T+30%G.F UL94V-0

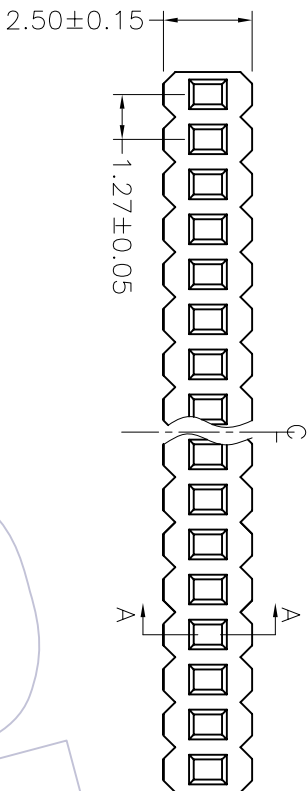

## Ordering Information

2385 - 1 XX S XX C Y N T 1

No. of Pins per ROW: 02-50Pin  
 Contact Plating:  
 G0=Gold Flash  
 G1=3µ"Gold  
 G2=5µ"Gold  
 G3=10µ"Gold  
 G4=15µ"Gold  
 G5=30µ"Gold  
 S0=Gold Flash/Tin  
 S1=3µ"Gold/Tin  
 S2=5µ"Gold/Tin  
 S3=10µ"Gold/Tin  
 S4=15µ"Gold/Tin  
 S5=30µ"Gold/Tin  
 SN=Tin

Packaging:  
 T=Tube

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		DRAW		SCALE	UNIT	PART NO.	TITLE:
					XXX	±0.40	DESIGN	5:1				
A0	08/02/16	NEW			XXX	±0.25	CHECK	A4	1/1	2385-1XXSXXCYNT1	FH1.27mm SINGLE 180° H=8.50	
					Angle	± 3'	APPROVE					
					DIM	TOL		PROJ.			Customer NO.	

**WCON** 维峰五金电子有限公司  
 WAFER HARDWARE ELECTRONICS CO.,LTD