



2521-1XXMXXXUNX1 2521-1XXMXXXUNX2 2530-1XXMXXXUNX1 2530-1XXMXXXUNX2


1.00mm Female Header, Single/Dual Row

SPECIFICATIONS


Current Rating: 1.00AMP
 Contact Resistance: 15mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : 500V AC/Minute
 Operation Temperature: -55°C to +125°C
 Contact Material: Phosphor Bronze
 Contact plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T+30%GF

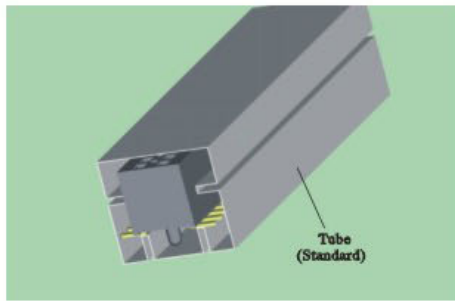


2521-2XXMXXXUNX1



2521-2XXMXXXUNX2



2530-2XXMXXXUNX1



2530-2XXMXXXUNX2

25XX-2 XX M XX X UN X X

HEIGHT OF HOUSING
 21:2.10
 30:3.00


NO. OF PINS
 PER ROW
 02~50P

CONTACT	PLATING
G0:1u" Gold	S0:1u" Gold/Tin
G1:3u" Gold	S1:3u" Gold/Tin
G2:5u" Gold	S2:5u" Gold/Tin
G3:10u" Gold	S3:10u" Gold/Tin
G4:15u" Gold	S4:15u" Gold/Tin
G5:30u" Gold	S5:30u" Gold/Tin
G6:20u" Gold	S6:20u" Gold/Tin
	SN: Tin

INSULATOR MATERIAL
 C:PA6T
 D:LCP


PACKING
 T:Tube
 R:Tape & Reel
 P:Tube+CAP

SINGLE ROW

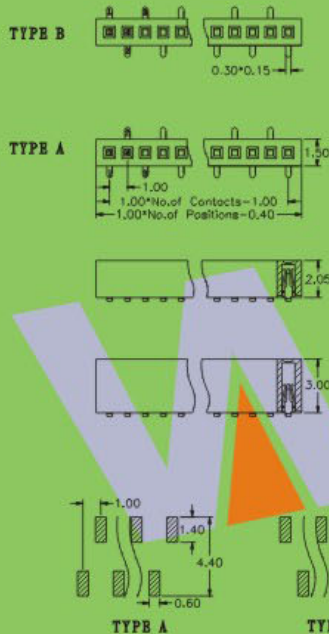

Recommended P. C. B Layout (Top Side)

DUAL ROW

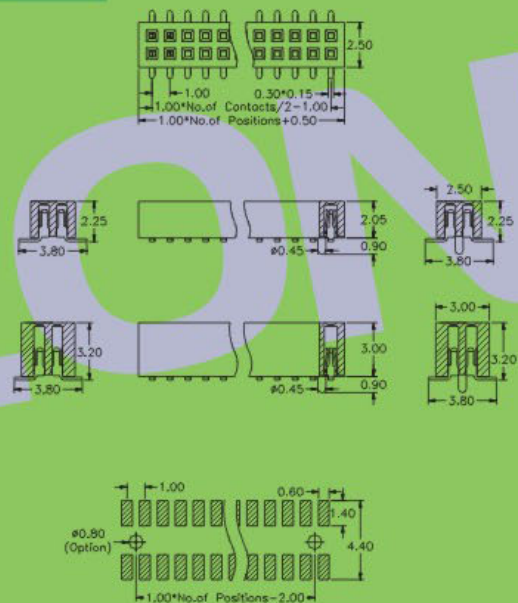

Recommended P. C. B Layout (Top Side)

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418