



2220T-1XXMXXXUNX1



2220T-1XXMXXXUNX2



2.00mm Female Header, Single/Dual Row

SPECIFICATIONS




FILE NO. E248993

Current Rating: 2.0AMP
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : 500V AC/Minute
 Operation Temperature: -55°C to +125°C
 Contact Material: Phosphor Bronze
 Contact plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T+30%GF

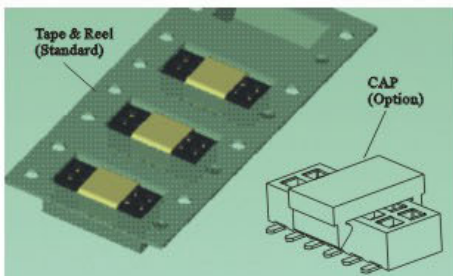



2220T-2XXMXXXUNX1



2220T-2XXMXXXUNX2

2220T-X XX M XX X UN X X

TOP ENTER	NO. OF ROW 1: Single Row 2: Dual Row	NO. OF PINS PER ROW 02~40P	CONTACT PLATING G0: 1u" Gold S0: 1u" Gold/Tin G1: 3u" Gold S1: 3u" Gold/Tin G2: 5u" Gold S2: 5u" Gold/Tin G3: 10u" Gold S3: 10u" Gold/Tin G4: 15u" Gold S4: 15u" Gold/Tin G5: 30u" Gold S5: 30u" Gold/Tin G6: 20u" Gold S6: 20u" Gold/Tin SN: Tin	INSULATOR MATERIAL C: PA6T D: LCP	PACKING T: Tube R: Tape & Reel P: Tube+CAP
-----------	--	-------------------------------	---	---	---

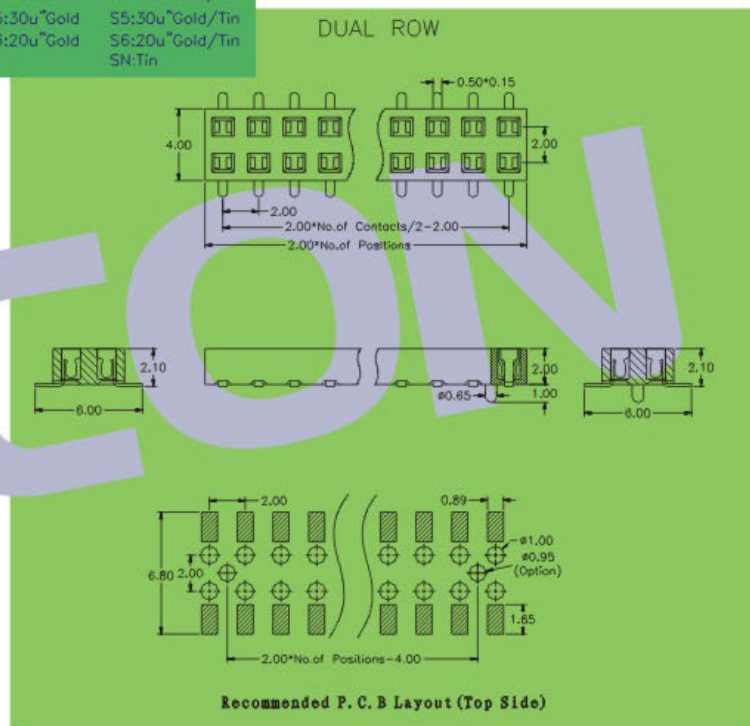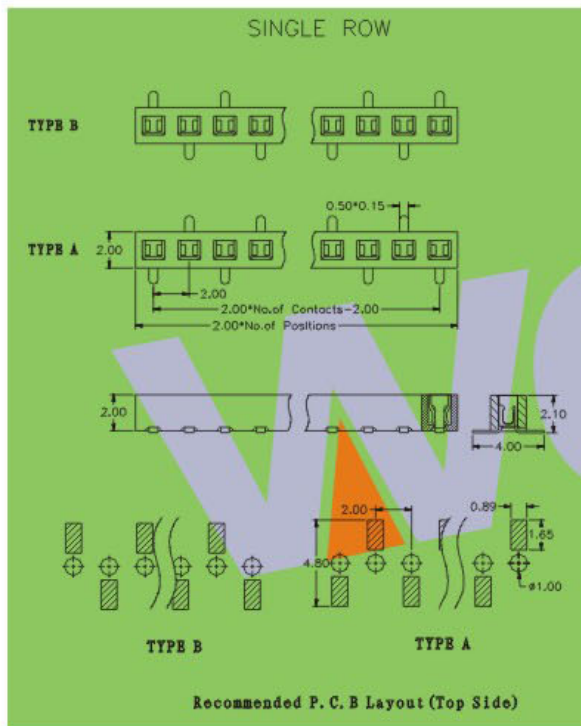

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※