


2221-2XXMXXXUNX1





2221-2XXMXXXUNX2

## 2.00mm Female Header, Dual Row


### SPECIFICATIONS



Current Rating: 2.0AMP  
 Contact Resistance: 20mΩ Max.  
 Insulation Resistance: 1000MΩ Min.  
 Withstanding Voltage : 500V AC/Minute  
 Operation Temperature: -55°C to +125°C  
 Contact Material: Phosphor Bronze  
 Contact plating: Au or Sn Over Ni  
 Insulator Material: Polyester (UL94V-0)  
 Standard: PA6T+30%GF

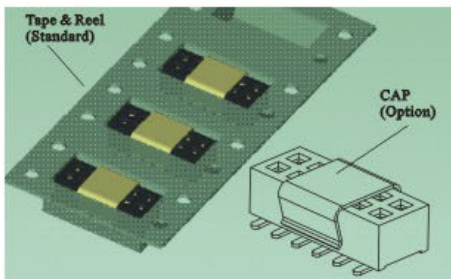

2221-2XXMXXXUNX3



2221-2XXMXXXUNX4

## 2221-2 XX M XX X UN X X

NO. OF PINS  
 PER ROW  
 02~40P


CONTACT PLATING  
 G0: 1u" Gold S0: 1u" Gold/Tin  
 G1: 3u" Gold S1: 3u" Gold/Tin  
 G2: 5u" Gold S2: 5u" Gold/Tin  
 G3: 10u" Gold S3: 10u" Gold/Tin  
 G4: 15u" Gold S4: 15u" Gold/Tin  
 G5: 30u" Gold S5: 30u" Gold/Tin  
 G6: 20u" Gold S6: 20u" Gold/Tin  
 SN: Tin

INSULATOR MATERIAL  
 C: PA6T  
 D: LCP


PACKING  
 T: Tube  
 R: Tape & Reel  
 P: Tube+CAP

SINGLE ROW

DUAL ROW

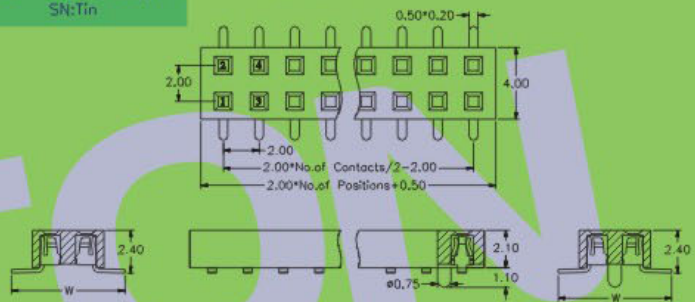

PART NO.	DIM "W"
2221-2XXMXXXUNX1	5.35
2221-2XXMXXXUNX2	5.35
2221-2XXMXXXUNX3	6.35
2221-2XXMXXXUNX4	6.35

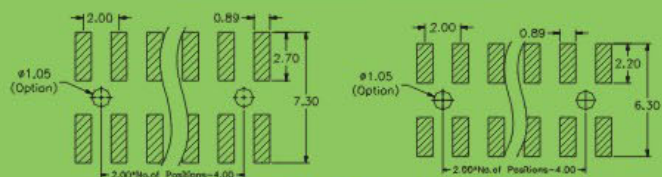

Recommended P. C. B Layout (Top Side)

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920  
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418