
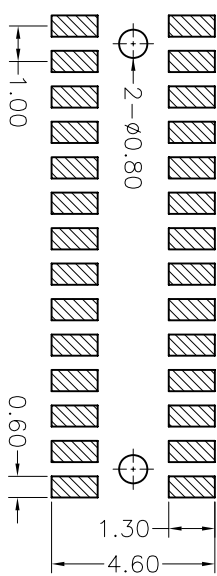


HSHF

NOTES:

Current Rating: 1.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au or Sn over Ni
 Insulator Material: PA6T+30%GF UL94V-0

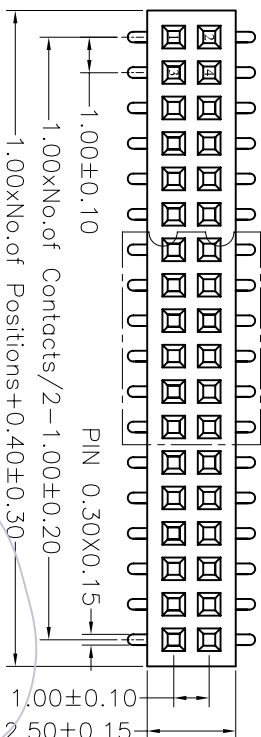

Ordering Information



2521-2 XX M XX CUN X X

No. of Pins per Row: 02-50Pin


Contact Plating:
 G0=Gold Flash
 G1=3u"Gold
 G2=5u"Gold
 G3=10u"Gold
 G4=15u"Gold
 G5=30u"Gold
 S0=Gold Flash/Tin
 S1=3u"Gold/Tin
 S2=5u"Gold/Tin
 S3=10u"Gold/Tin
 S4=15u"Gold/Tin
 S5=30u"Gold/Tin
 SN=Tin

Packing:
 T=Tube
 P=Tube+CAP
 R=Tape&Reel+CAP

Series No.
 1=Type 1
 2=Type 2

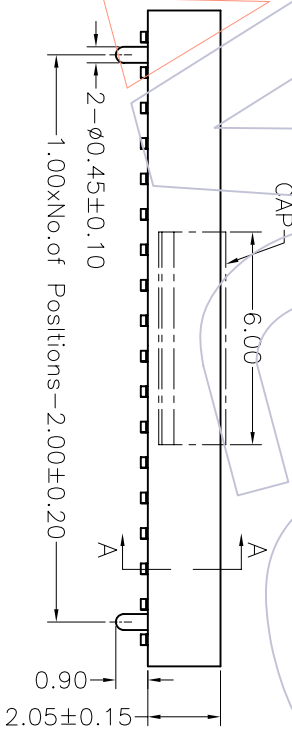

TYPE 2 WITH POST



TYPE 1 WITHOUT POST

SECTION A-A

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	WEIXD	08.09.23	SCALE	5:1	<p>WCON 维峰五金电子有限公司 WAVE HARDWARE ELECTRONICS CO.,LTD</p>	PART NO.	2521-2XXMXXCUNXX
A0	08/09/23	NEW			XXX ±0.40	DESIGN		UNIT	mm			TITLE:	FH1.00 DUAL ROW SMT H=2.10
					XXX ±0.25	CHECK		SIZE	A4				
					XXX ±0.15	APPROVE		SHEET	1/1				
					Angle ± 3'			PROJ.				Customer NO.	