



2227T-1XXMXXXUNX1





2227T-1XXMXXXUNX2

# 2. 00mm Female Header, Single/Dual Row


## SPECIFICATIONS



Current Rating: 2.0AMP  
 Contact Resistance: 20mΩ Max.  
 Insulation Resistance: 1000MΩ Min.  
 Withstanding Voltage : 500V AC/Minute  
 Operation Temperature: -55°C to +125°C  
 Contact Material: Phosphor Bronze  
 Contact plating: Au or Sn Over Ni  
 Insulator Material: Polyester (UL94V-0)  
 Standard: PA6T+ 30%GF

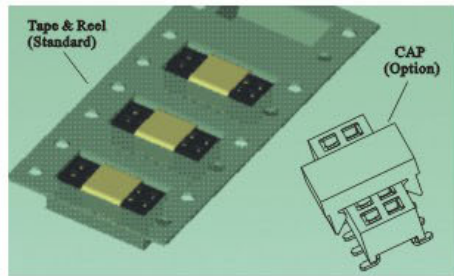



2227T-2XXMXXXUNX1



2227T-2XXMXXXUNX2

# 2227T-X XX M XX X UN X X

TOP ENTER	NO. OF ROW 1: Single Row 2: Dual Row	NO. OF PINS PER ROW 02~40P	CONTACT PLATING G0: 1u" Gold S0: 1u" Gold/Tin G1: 3u" Gold S1: 3u" Gold/Tin G2: 5u" Gold S2: 5u" Gold/Tin G3: 10u" Gold S3: 10u" Gold/Tin G4: 15u" Gold S4: 15u" Gold/Tin G5: 30u" Gold S5: 30u" Gold/Tin G6: 20u" Gold S6: 20u" Gold/Tin SN: Tin	INSULATOR MATERIAL B: PA6T D: LCP	PACKING T: Tube R: Tape & Reel P: Tube+CAP
-----------	--------------------------------------------	-------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----------------------------------------	-----------------------------------------------------

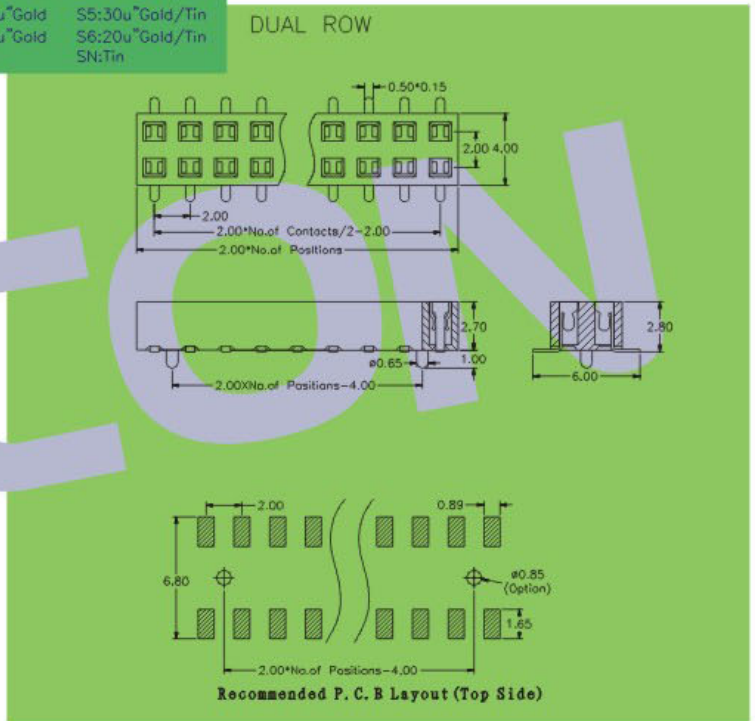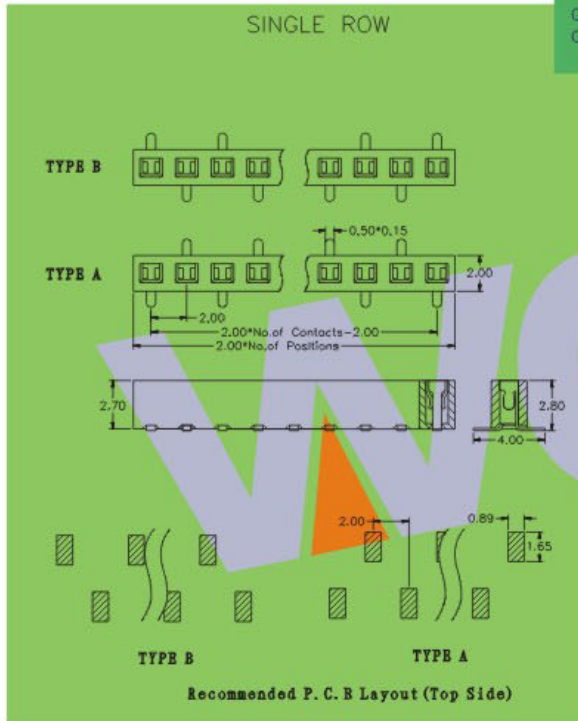

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920  
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418