



# 2.00mm Female Header, Single/Dual Row

## SPECIFICATIONS


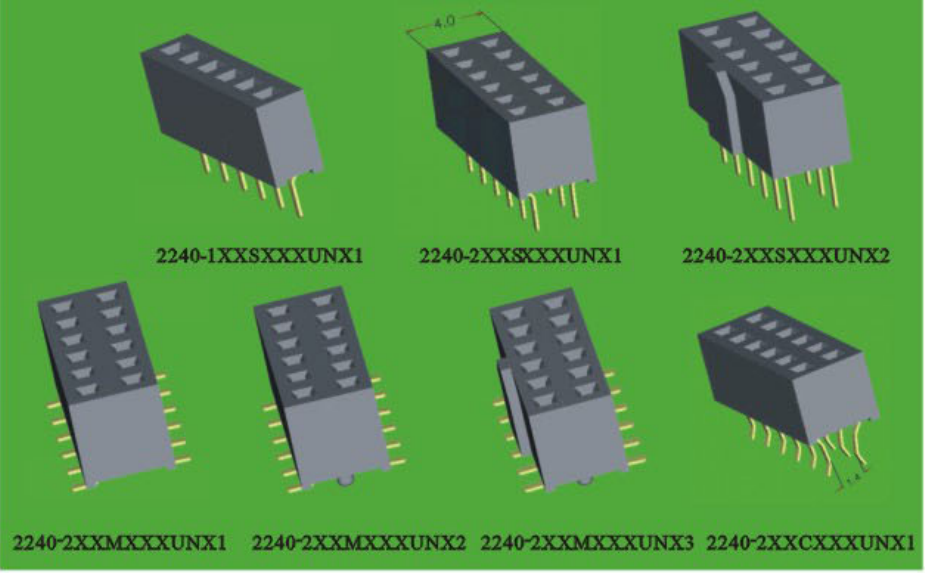


Current Rating: 2.0AMP  
 Contact Resistance: 20m Ω Max.  
 Insulation Resistance: 1000M Ω Min.  
 Withstanding Voltage : 500V AC/Minute  
 Operation Temperature: -55°C to +125°C  
 Contact Material: Phosphor Bronze  
 Contact plating: Au or Sn Over Ni  
 Insulator Material: Polyester (UL94V-0)  
 Standard: PA6T+30%GF

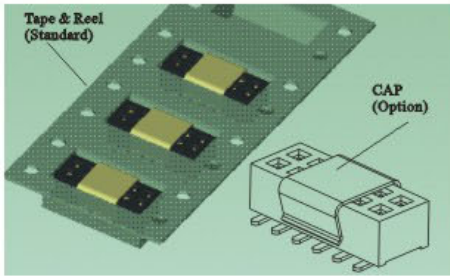

## 2240-X XX X XX X UN X X

<b>NO. OF ROW</b> 1: Single Row 2: Dual Row	<b>NO. OF PINS PER ROW</b> 02~40P	<b>CONTACT SHAPE</b> S: Straight M: 180° SMT C: K Feet/Splint	<b>CONTACT PLATING</b> G0: 1u" Gold G1: 3u" Gold G2: 5u" Gold G3: 10u" Gold G4: 15u" Gold G5: 30u" Gold G6: 20u" Gold S0: 1u" Gold/Tin S1: 3u" Gold/Tin S2: 5u" Gold/Tin S3: 10u" Gold/Tin S4: 15u" Gold/Tin S5: 30u" Gold/Tin S6: 20u" Gold/Tin SN: Tin	<b>INSULATOR MATERIAL</b> C: PA6T D: LCP	<b>PACKING</b> T: Tube R: Tape & Reel P: Tube+CAP
---	--------------------------------------	--	---	--	--

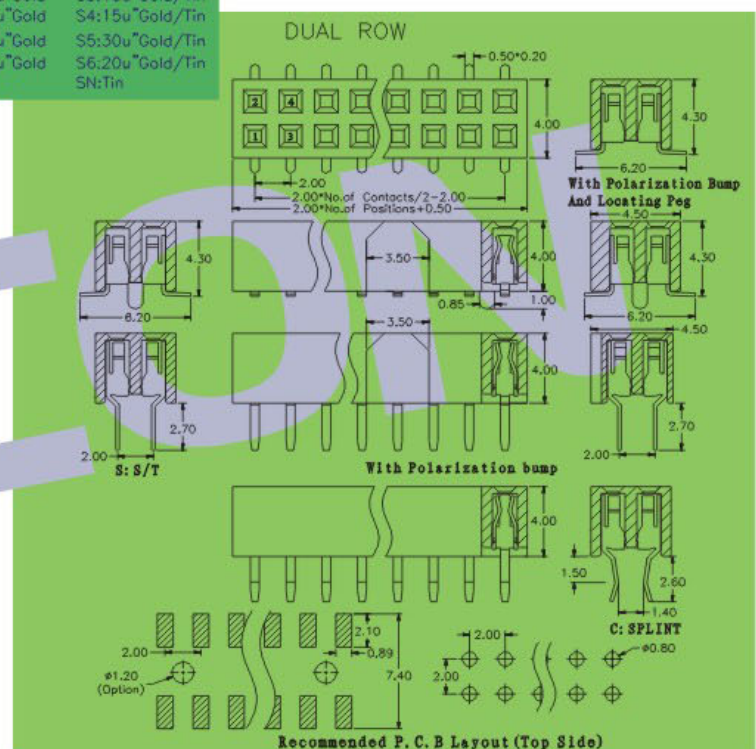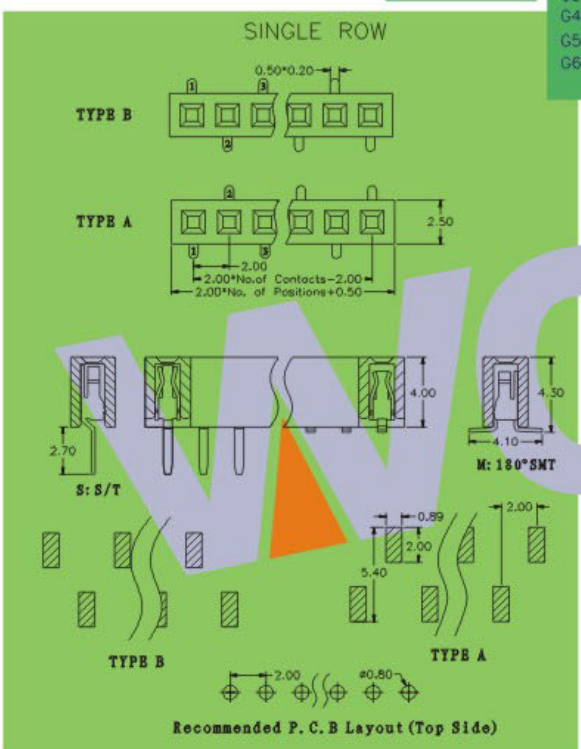

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920  
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418