



# 1.00/1.27mm Female Header, Single Row


## SPECIFICATIONS



Current Rating: 1.00AMP  
 Contact Resistance: 15m Ω Max  
 Insulation Resistance: 1000M Ω Min.  
 Withstanding Voltage : 500V AC/Minute  
 Operation Temperature: -55°C to +125°C  
 Contact Material: Phosphor Bronze  
 Contact plating: Au or Sn Over Ni  
 Insulator Material: Polyester (UL94V-0)  
 Standard: LCP+30%GF

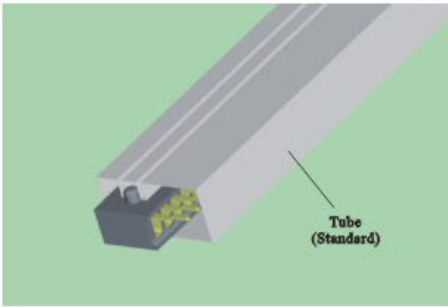

2537-1XXXXXDUNX1



2337-1XXXXXDUNX1

## 2X37-1 XX Z XX D UN X 1

PITCH  
 5:1.00  
 3:1.27


NO. OF PINS  
 PER ROW  
 02~50P

CONTACT PLATING  
 G0:1u" Gold S0:1u" Gold/Tin  
 G1:3u" Gold S1:3u" Gold/Tin  
 G2:5u" Gold S2:5u" Gold/Tin  
 G3:10u" Gold S3:10u" Gold/Tin  
 G4:15u" Gold S4:15u" Gold/Tin  
 G5:30u" Gold S5:30u" Gold/Tin  
 G6:20u" Gold S6:20u" Gold/Tin  
 SN: Tin


PACKING  
 T: Tube  
 R: Tape & Reel  
 P: Tube+CAP

### 2537 Series

### 2337 Series

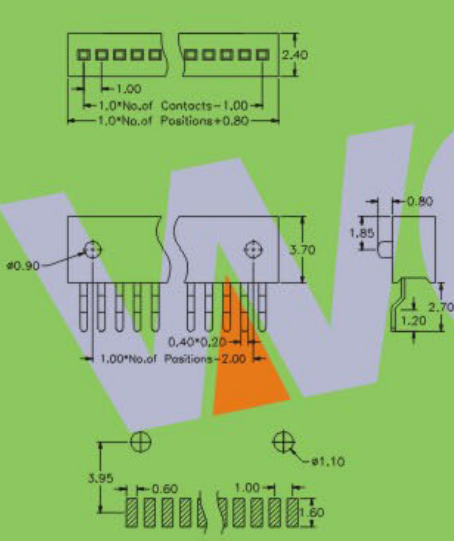

Recommended P. C. B Layout (Top Side)

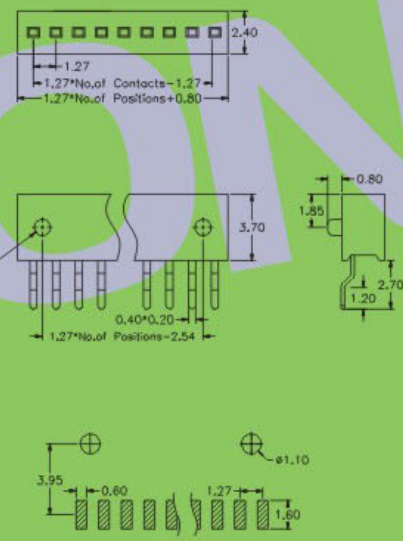

Recommended P. C. B Layout (Top Side)

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920  
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418