




2320T-1XXMXXXUNX1





2320T-1XXMXXXUNX2


1. 2.7mm Female Header, Single/Dual Row

SPECIFICATIONS

Current Rating: 1AMP
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : 500V AC/Minute
 Operation Temperature: -55°C to +125°C
 Contact Material: Phosphor Bronze
 Contact plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T/LCP+30%GF

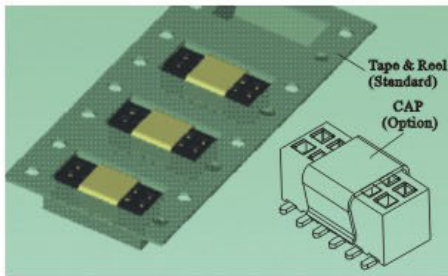



2320T-2XXMXXXUNX1



2320T-2XXMXXXUNX2

2320T-X XX M XX X UN X X

TOP ENTER	NO.OF ROW 1:Single Row 2: Dual Row	NO.OF PINS PER ROW 02~50P	CONTACT PLATING G0:1u" Gold S0:1u" Gold/Tin G1:3u" Gold S1:3u" Gold/Tin G2:5u" Gold S2:5u" Gold/Tin G3:10u"Gold S3:10u"Gold/Tin G4:15u"Gold S4:15u"Gold/Tin G5:30u"Gold S5:30u"Gold/Tin G6:20u"Gold S6:20u"Gold/Tin SN:Tin	INSULATOR MATERIAL C:PA6T D:LCP	PACKING T:Tube R:Tape & Reel P:Tube+CAP
-----------	--	------------------------------	--	---------------------------------------	--

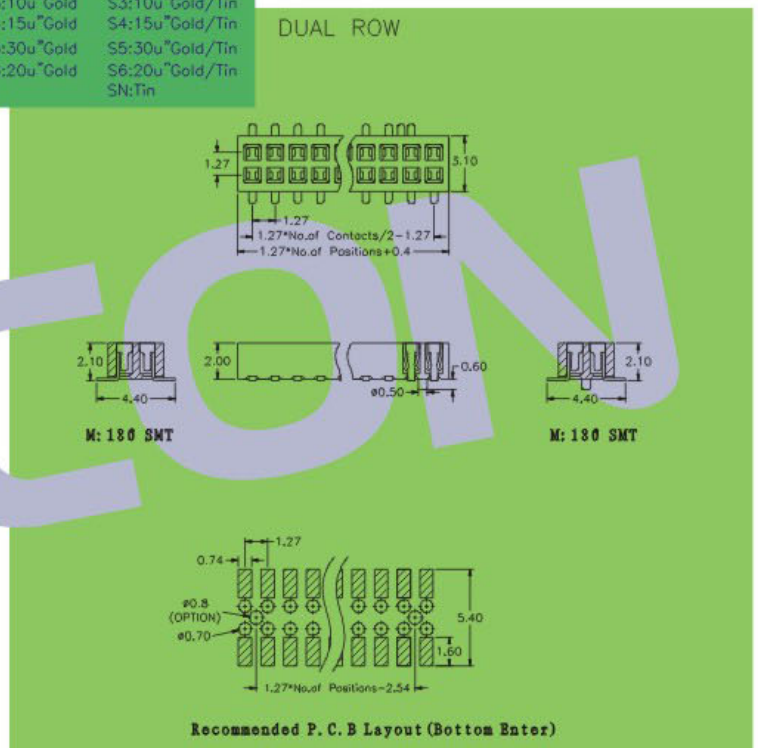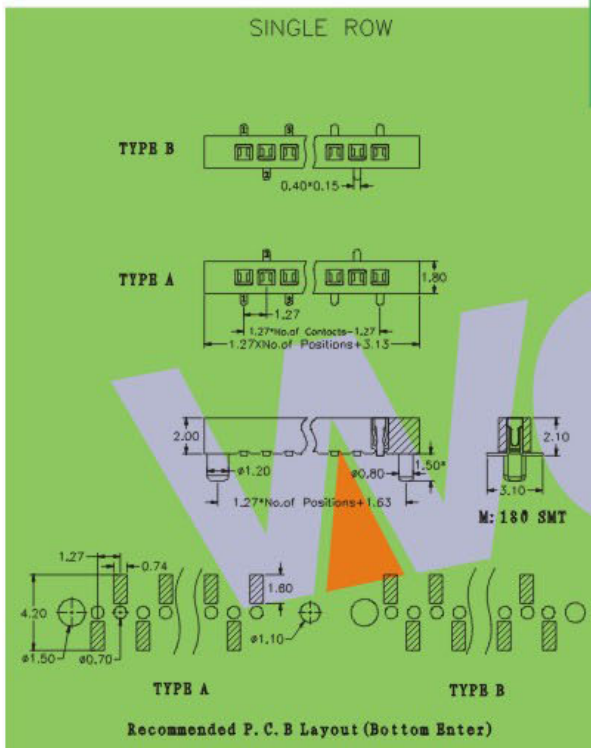

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418