HSF

NOTES:
Current Rating: 1.0AMP
Withstand Voltage: 500V AC/DC
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩMin
Operation Temperature: -40℃ to +105℃

Contact Material: Phosphor Bronze
Contact plating: Au or Sn over Ni
Insulator Material: PA6T+30%G.F UL94V-0

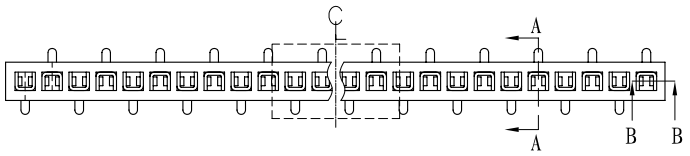

Recommended P.C.B Layout(BOTTOM ENTER)
(PCB BOARD TOLERANCE±0.05)

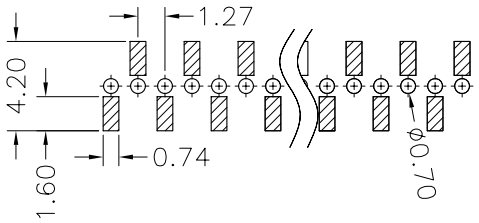

TYPE 1

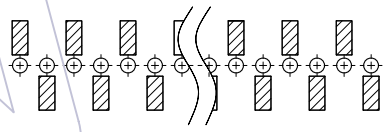

TYPE 2

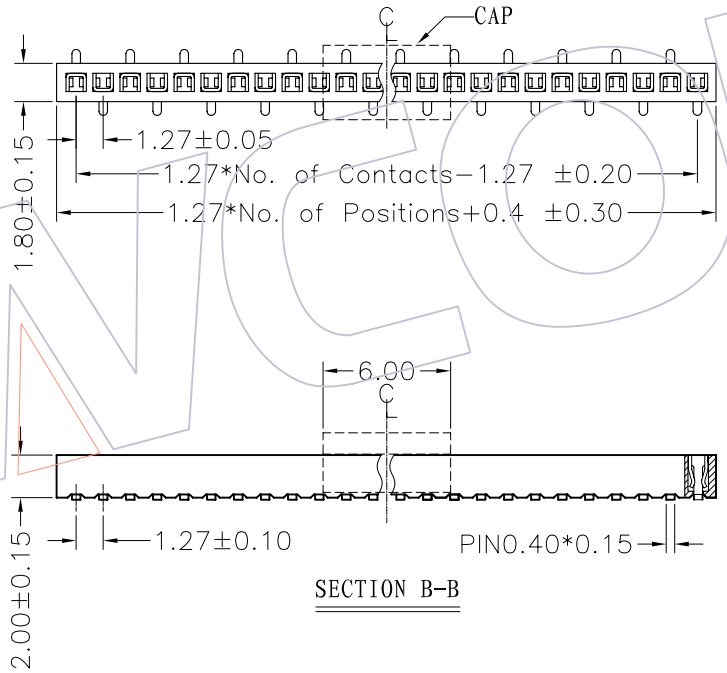

SECTION B-B

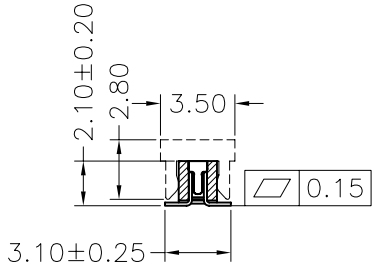

SECTION A-A

Ordering Information

2320T - 1 XX M XX CUN T X

- XX: No.of Pins per ROW:02~50PIN
- XX: Contact Plating:
  G0=Gold Flash
  G1=3μ"Gold
  G2=5μ"Gold
  G3=10μ"Gold
  G4=15μ"Gold
  G5=30μ"Gold
  S0=Gold Flash/Tin
  S1=3μ"Gold/Tin
  S2=5μ"Gold/Tin
  S3=10μ"Gold/Tin
  S4=15μ"Gold/Tin
  S5=30μ"Gold/Tin
  SN=Tin
- T: Packing:
  T=Tube
  R=Tape&Reel+CAP
  P=Tube+CAP
- X: Series No.
  3=TYPE 1
  4=TYPE 2

TITLE	PART NO.
TYPE 1	2320T-1XXMXXCUNT3
TYPE 2	2320T-1XXMXXCUNT4

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
A0	08/02/14	NEW		

OPERATION		DRAW		
X.X	±0.40	DESIGN		
X.XX	±0.25			
X.XXX	±0.15	CHECK		
Angle	± 3°	APPROVE		
DIM	TOL			

SCALE	3:1
UNIT	mm
SIZE	A4
SHEET	
PROJ.	

WCON 维峰五金电子有限公司
WAFE HARDWARE ELECTRONICS CO.LTD

PART NO.	SEE TABLE
TITLE:	FH1.27mm Single Bottom Enter SMT H=2.0
Customer NO.	

WCON