


2334-1XXSXXXUNX1





2334-2XXSXXXUNX1

# 1. 27mm Female Header, Single/Dual Row

## SPECIFICATIONS




Current Rating: 1.0AMP  
 Contact Resistance: 20mΩ Max.  
 Insulation Resistance: 1000MΩ Min.  
 Withstanding Voltage : 500V AC/Minute  
 Operation Temperature: -55°C to +125°C  
 Contact Material: Phosphor Bronze  
 Contact plating: Au or Sn Over Ni  
 Insulator Material: Polyester (UL94V-0)  
 Standard: PA6T+30%GF

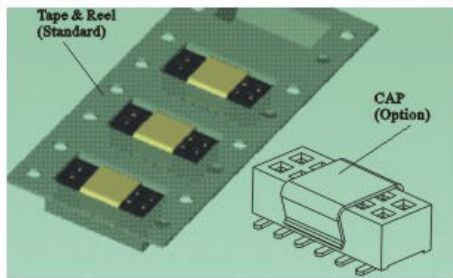


2334-1XXMXXXUNX1




2334-1XXMXXXUNX2



2334-2XXMXXXUNX1





2334-2XXMXXXUNX2



2334-2XXMXXXUNX3

# 2334-X XX X XX X UN X X

<b>NO.OF ROW</b> 1:Single Row 2: Dual Row	<b>NO.OF PINS PER ROW</b> 02~50P	<b>CONTACT SHAPE</b> S: Straight M: 180° SMT	<b>CONTACT PLATING</b> G0:1u" Gold G1:3u" Gold G2:5u" Gold G3:10u" Gold G4:15u" Gold G5:30u" Gold G6:20u" Gold	<b>SO:1u" Gold/Tin S1:3u" Gold/Tin S2:5u" Gold/Tin S3:10u" Gold/Tin S4:15u" Gold/Tin S5:30u" Gold/Tin S6:20u" Gold/Tin SN: Tin</b>	<b>INSULATOR MATERIAL</b> C:PA6T D:LCP	<b>PACKING</b> T:Tube R:Tape & Reel P:Tube+CAP
---	-------------------------------------	--	---	--	--	---

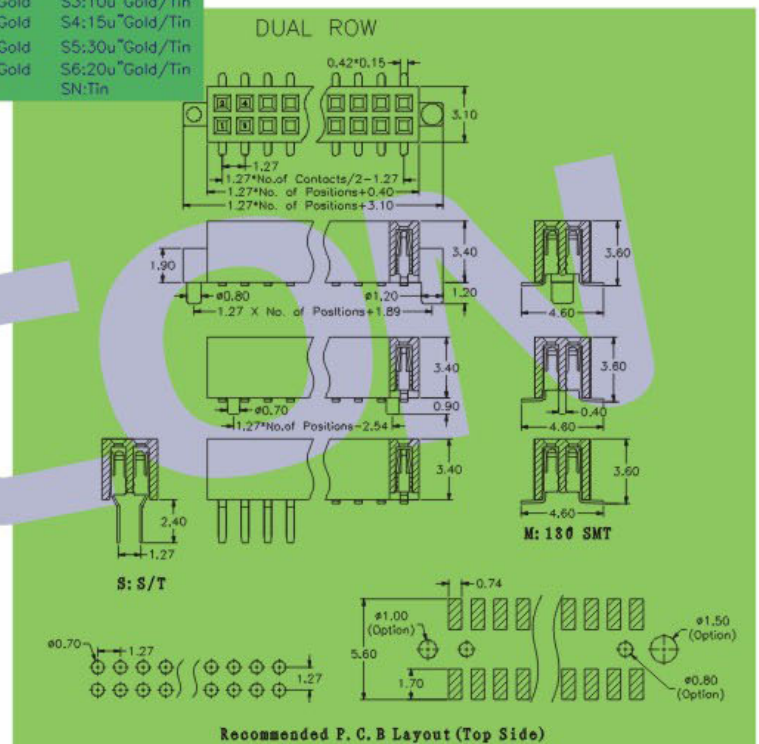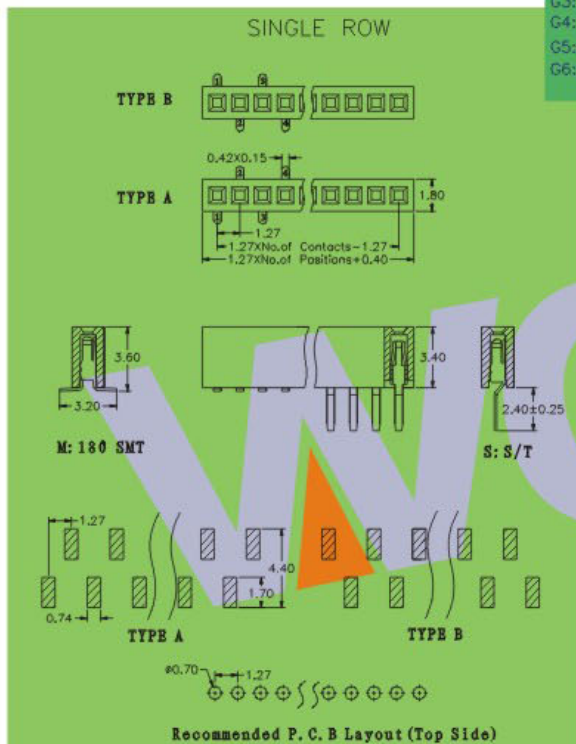

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920  
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418