



# 1. 27mm Female Header, Single/Dual Row

## SPECIFICATIONS



Current Rating: 1.0AMP  
 Contact Resistance: 20m  $\Omega$  Max.  
 Insulation Resistance: 1000M  $\Omega$  Min.  
 Withstanding Voltage : 500V AC/Minute  
 Operation Temperature: -55°C to +125°C  
 Contact Material: Phosphor Bronze  
 Contact plating: Au or Sn Over Ni  
 Insulator Material: Polyester (UL94V-0)  
 Standard: PA6T+30%GF

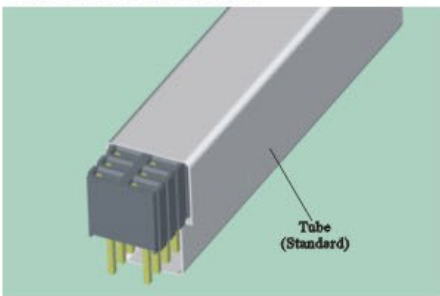



2446-2XXSXXCYNTX



2346-1XXSXXCYNTX

## 2X46T-X XX S XX C YN T X

<b>PITCH</b> 3:1.27 4:1.27*2.54	<b>TOP ENTER</b>	<b>NO. OF ROW</b> 1:Single Row 2:Dual Row	<b>NO. OF PINS PER ROW</b> 02~50P	<b>CONTACT PLATING:</b> G0:1u" Gold S0:1u" Gold/Tin G1:3u" Gold S1:3u" Gold/Tin G2:5u" Gold S2:5u" Gold/Tin G3:10u"Gold S3:10u"Gold/Tin G4:15u"Gold S4:15u"Gold/Tin G5:30u"Gold S5:30u"Gold/Tin G6:20u"Gold S6:20u"Gold/Tin SN:Tin	<b>INSULATOR MATERIAL</b> C:PA6T	<b>LIST NO.</b> 1:A=1.60 2:A=2.40 3:A=3.00
---------------------------------------	------------------	---	--------------------------------------	--	-------------------------------------	---

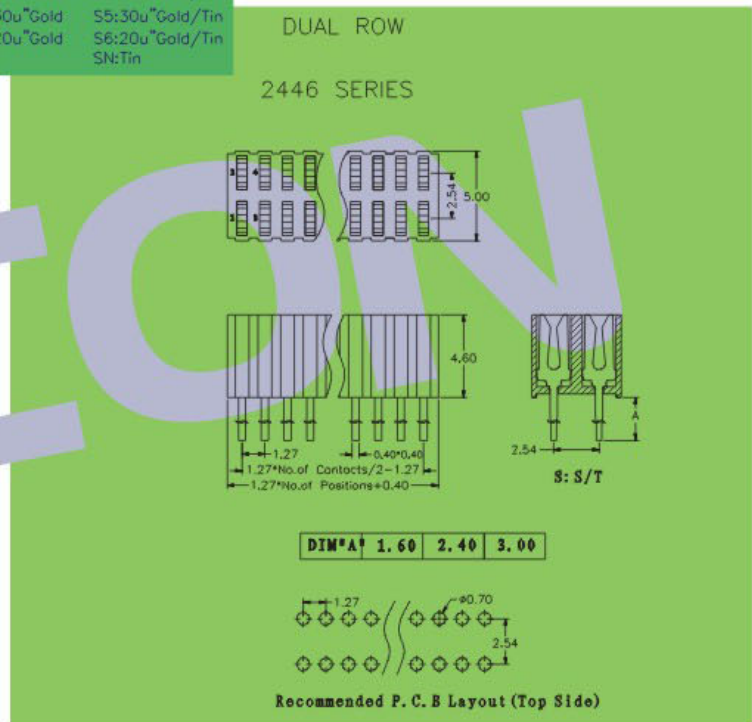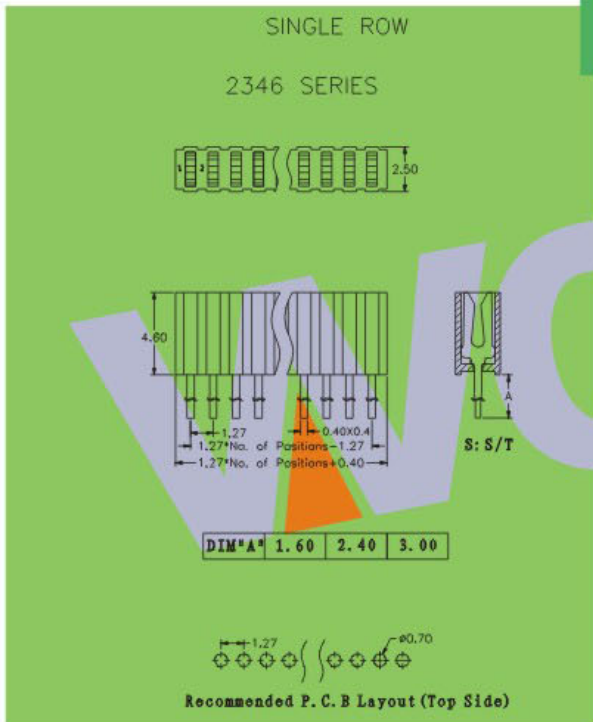

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920  
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418