

HSP

NOTES:

Current Rating: 2.0AMP
 Withstand Voltage: 500V AC/DC
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au or Sn over Ni
 Insulator Material: PA6T+30%G.F UL94V-0



Ordering Information

2243 - 1 XX Z XX C UN X 1


No. of Pins per ROW: 92-40PIN

Contact Plating:
 GC=Gold Flash
 G1=5μ"Gold
 G2=5μ"Gold
 G3=10μ"Gold
 G4=15μ"Gold
 G5=30μ"Gold
 SF=Gold Flash/Tin
 S1=5μ"Gold/Tin
 S2=5μ"Gold/Tin
 S3=10μ"Gold/Tin
 S4=15μ"Gold/Tin
 S5=30μ"Gold/Tin
 SN=Tin

Packing:
 T=Tube
 R=Tray&Reel

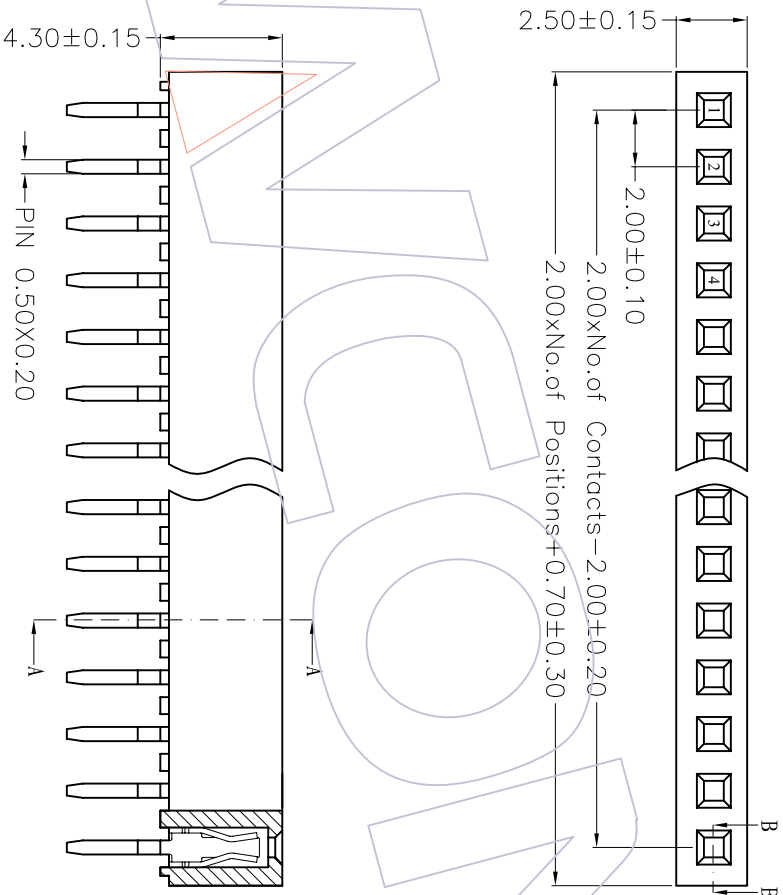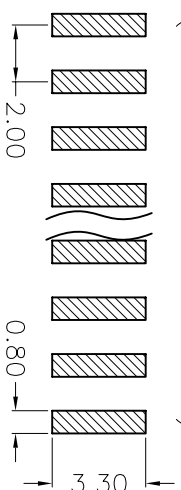

SECTION B-B



SECTION A-A

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		DRAW	WEIXD	08/08/29	SCALE		PART NO.	TITLE:
					Angle	± 3'				UNIT	mm		
A0	08/08/29	NEW			X.X	±0.40	DESIGN					2243-1XXZXXCUNX1	FIG. 00mm SINGLE 90° SMT H=4.30
					X.XX	±0.25	CHECK						
					X.XXX	±0.15	APPROVE						

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO.,LTD