

HSHF

NOTES:


Current Rating: 2.0AMP
 Withstand Voltage: 500V AC/DC
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩMin
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au or Sn over Ni
 Insulator Material: PA6T+30%G.F UL94V-0

Ordering Information


2240-1XXSXXCUNT1

No. of Pins per ROW: 32=40PIN
 Contact Plating: G=Gold Flash, T=Tube
 GI=3μ"Gold, GS=5μ"Gold, G3=10μ"Gold, G4=15μ"Gold, G5=30μ"Gold
 SP=Gold Flash, TM
 SI=3μ"Gold/Tin, SS=5μ"Gold/Tin, S1=10μ"Gold/Tin, S2=15μ"Gold/Tin, S3=30μ"Gold/Tin, SN=1Tin

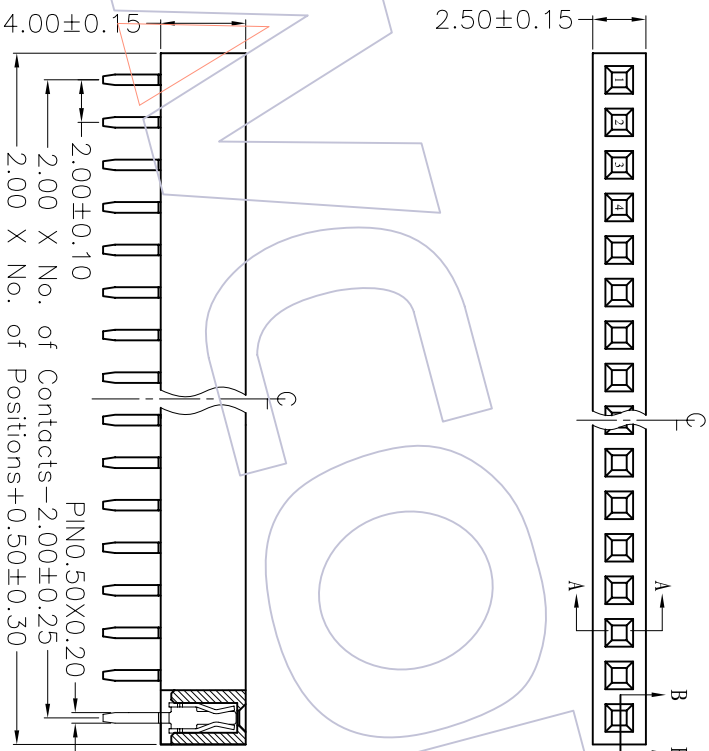


2.00 ± 0.10
 2.00 X No. of Contacts - 2.00 ± 0.25
 2.00 X No. of Positions + 0.50 ± 0.30

SECTION B-B



SECTION A-A

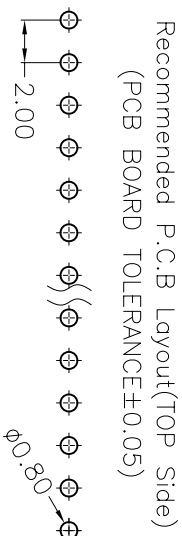

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		DRAW	SCALE	WCON	
					Angle	± 3'			UNIT	mm
A0	08/02/28	NEW			X.X	±0.40	Malting	3:1	A4	2240-1XXSXXCUNT1
					X.XX	±0.25	DESIGN		1/1	FlH2.00mm SINGLE 180° H=4.00
					X.XXX	±0.15	CHECK			
					DM	TOL	APPROVE			
1										
2										
3										
4										
5										
6										
7										
8										
9										
10										

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO., LTD