

HSPF

NOTES:

Current Rating: 2.0AMP
 Voltage Rating: 500V AC/DC
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩMin
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au or Sn over 50 μm Ni
 Insulator Material: PA6T+30%G. F UL94V-0

Ordering Information


2243N - 2 XX M XX CUNT X

No. of Pins per ROW: 02~40Pin


Contact Plating: GO=Gold Flash
 GI=3μ"Gold
 GS=5μ"Gold
 GA=15μ"Gold
 GS=30μ"Gold
 SO=Gold Flash/Tm
 SI=3μ"Gold/Tm
 S2=5μ"Gold/Tm
 S3=10μ"Gold/Tm
 S4=15μ"Gold/Tm
 S5=30μ"Gold/Tm
 SN=1Tm

Packing: T=Tube
 R=Tube&Reel+CAP
 P=Tube+CAP


Series No. 3=TYPE 1
 4=TYPE 2

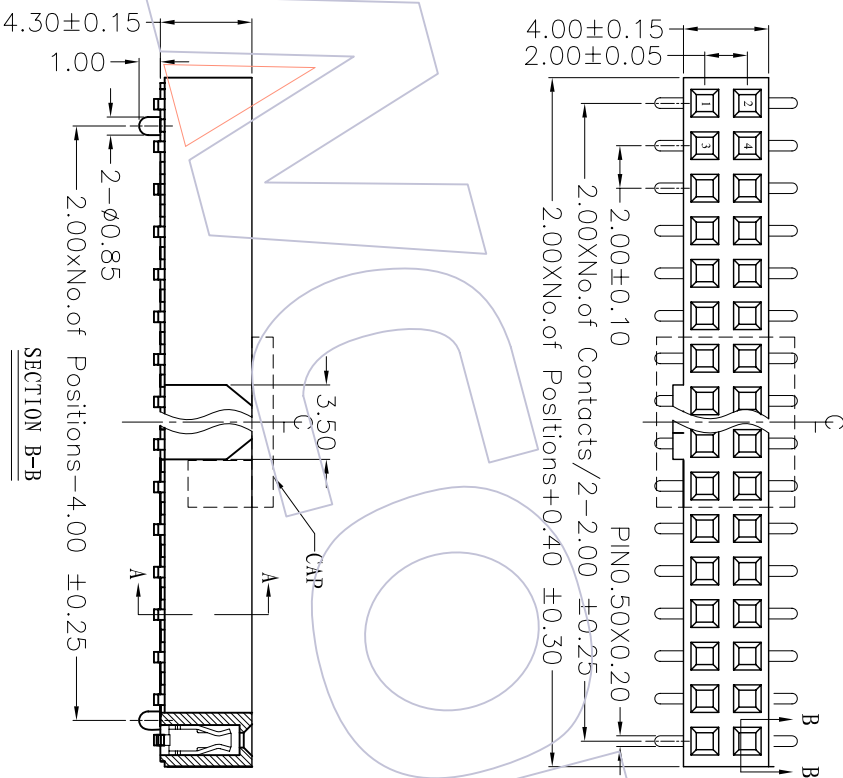


SECTION B-B

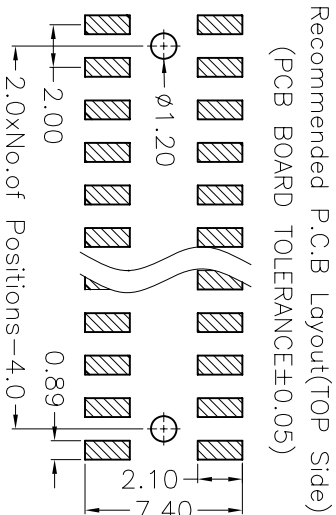

Recommended P.C.B Layout(TOP Side)
 (PCB BOARD TOLERANCE±0.05)



TYPE 1 W/O POST

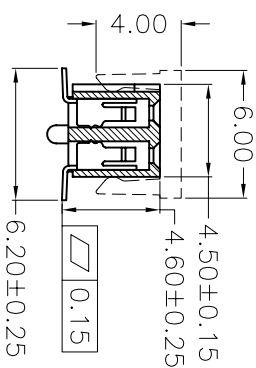

TYPE 2 WITH POST

SECTION A-A

TYPE	PART NO.
TYPE 1	2243N-2XXMXXCUNT3
TYPE 2	2243N-2XXMXXCUNT4

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO.,LTD

PART NO. SEE TABLE
 TITLE: 2.00mm DUAL FEMALE HEADER SMT H=4.3 W=4.0 WITH STOP

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	SCALE	PART NO.
A0	08/02/28	NEW			XXX ±0.15	DESIGN CHECK	3:1 mm A4	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle DIM	APPROVE	UNIT SIZE SHEET	CUSTOMER NO.