

HSP

NOTES:

Current Rating: 2.0AMP
 Withstand Voltage: 500V AC/DC
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩMin
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au or Sn over Ni
 Insulator Material: PA6T+30%G.F UL94V-0

Ordering Information

2243N - 2 XX C XX CUNT X



No. of Pins per Row: 30-40Pin

Contact Plating: G=Gold Flash T=Tube

Packing: 1=TYPE 1 2=TYPE 2




Series No. 1=TYPE 1 2=TYPE 2

G=3μ"Gold
 GS=3μ"Gold
 G4=1μ"Gold
 GS=30μ"Gold
 S0=Gold Flash/Tm
 S1=3μ"Gold/Tm
 S2=5μ"Gold/Tm
 S3=10μ"Gold/Tm
 S4=5μ"Gold/Tm
 S5=30μ"Gold/Tm
 SN=1m

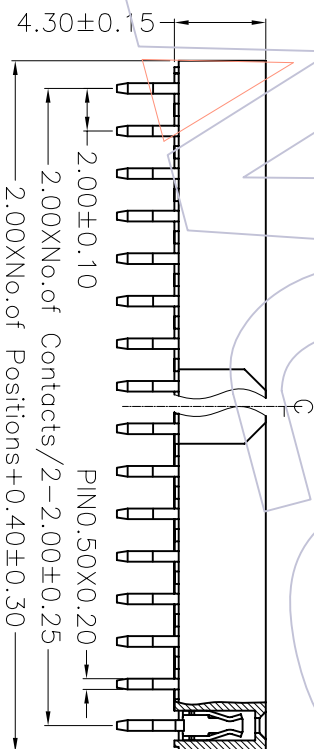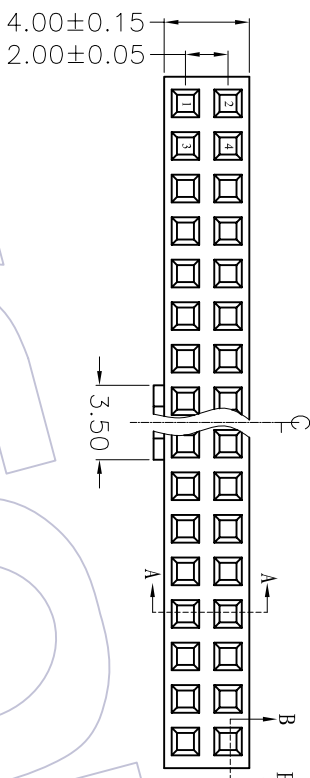

SECTION B-B

Recommended P.C.B Layout(TOP Side)
 (PCB BOARD TOLERANCE±0.05)

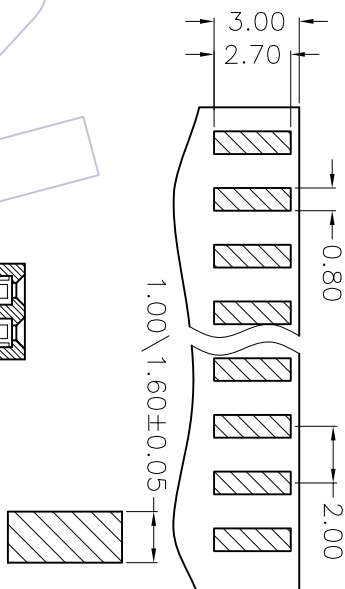

DIM: A	DIM: B	TITLE	Part No.
0.8	1.65	TYPE 1	2243N-2XXCXXCUNT1
1.4	2.20	TYPE 2	2243N-2XXCXXCUNT2

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	SCALE	PART NO.																
AO	08/02/28	NEW			<table border="1"> <tr> <td>X.X</td> <td>±0.40</td> </tr> <tr> <td>X.XX</td> <td>±0.25</td> </tr> <tr> <td>X.XXX</td> <td>±0.15</td> </tr> <tr> <td>Angle</td> <td>± 3'</td> </tr> </table>	X.X	±0.40	X.XX	±0.25	X.XXX	±0.15	Angle	± 3'	<table border="1"> <tr> <td>DESIGN</td> <td>CHECK</td> </tr> </table>	DESIGN	CHECK	<table border="1"> <tr> <td>UNIT</td> <td>mm</td> </tr> <tr> <td>SIZE</td> <td>A4</td> </tr> <tr> <td>SHEET</td> <td>1/1</td> </tr> </table>	UNIT	mm	SIZE	A4	SHEET	1/1	SEE TABLE
X.X	±0.40																							
X.XX	±0.25																							
X.XXX	±0.15																							
Angle	± 3'																							
DESIGN	CHECK																							
UNIT	mm																							
SIZE	A4																							
SHEET	1/1																							
1						Mei-Li	3:1	2243N-2XXCXXCUNT1																

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO. LTD

2.00 Dual FEMALE HEADER H=4.3 W=4.0 Splint