HSF

NOTES:
Current Rating: 2.0AMP
Withstand Voltage: 500V AC/DC
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Operation Temperature: -40℃ to +105℃

Contact Material: Phosphor Bronze
Contact plating: Au or Sn over Ni
Insulator Material: PA6T+30%G.F UL94V-0

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)



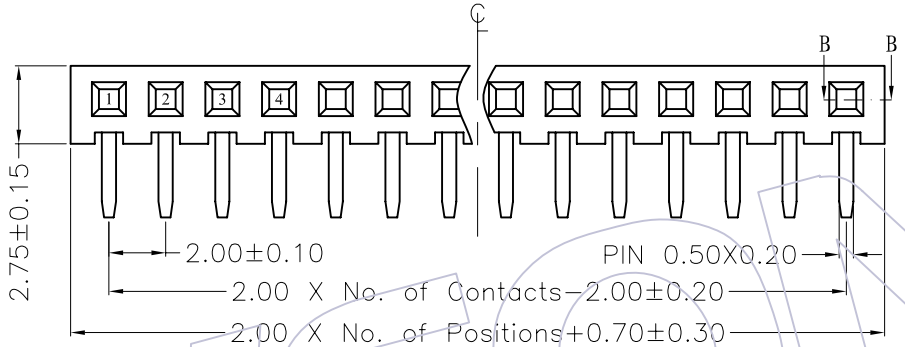

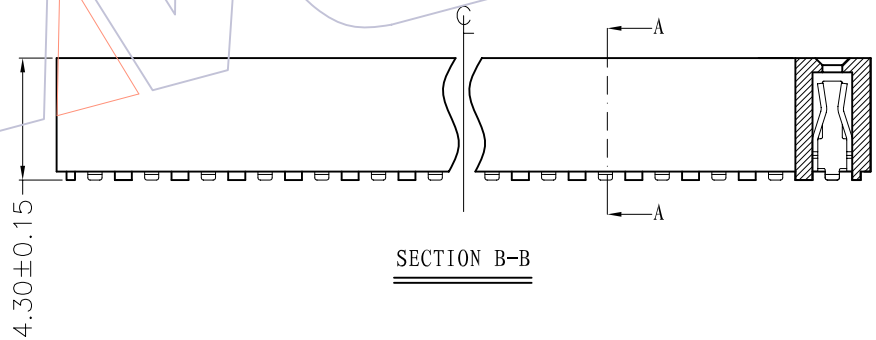

SECTION B-B



SECTION A-A

Ordering Information

2243 - 1 XX R XX CUNT T 1

- XX: No.of Pins per ROW:02~40PIN
- XX: Contact Plating:
  G0=Gold Flash
  G1=3μ"Gold
  G2=5μ"Gold
  G3=10μ"Gold
  G4=15μ"Gold
  G5=30μ"Gold
  S0=Gold Flash/Tin
  S1=3μ"Gold/Tin
  S2=5μ"Gold/Tin
  S3=10μ"Gold/Tin
  S4=15μ"Gold/Tin
  S5=30μ"Gold/Tin
  SN=Tin
- T: Packing:
  T=Tube
  P=Tube+CAP

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
A0	08/02/28	NEW	———	———

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

DRAW	MeiLiZ	08.02.28
DESIGN		
CHECK		
APPROVE		

SCALE	3:1
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

WCON 维峰五金电子有限公司
WAFE HARDWARE ELECTRONICS CO.LTD

PART NO.	2243-1XXRXXCUNT1
TITLE:	FH2.00mm SINGLE 90° H=4.30
Customer NO.	