
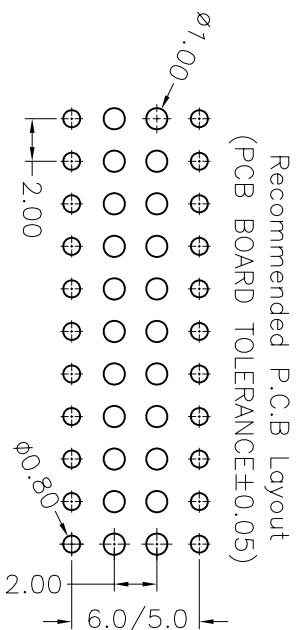


HSPF

NOTES:



- Current Rating: 2.0AMP
- Withstand Voltage: 500V AC/DC
- Contact Resistance: 20mΩ Max
- Insulation Resistance: 1000MΩMin
- Operation Temperature: -40°C to +105°C
- Contact Material: Phosphor Bronze
- Contact plating: Au or Sn over Ni
- Insulator Material: PA6T+30%G.F UL94V-0

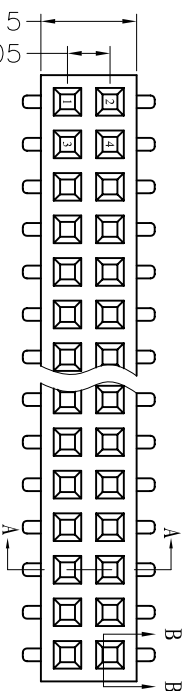

Ordering Information

2243 - 2 XX W XX CUN T X

- No. of Pins per ROW: 02-40PIN
- Contact Plating: G=Gold Flash, GI=3µ"Gold, G2=5µ"Gold, G3=10µ"Gold, G4=15µ"Gold, G5=30µ"Gold, S0=Gold Flash/Tin, S1=3µ"Gold/Tin, S2=5µ"Gold/Tin, S3=10µ"Gold/Tin, S4=15µ"Gold/Tin, S5=30µ"Gold/Tin, SN=Tin
- Packaging: T=Tube, P=Tube+CAP, R=Tapex+Reel+CAP
- Series No.: 1=TYPE 1, 2=TYPE 2

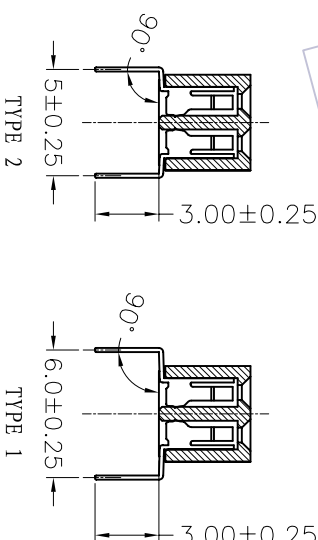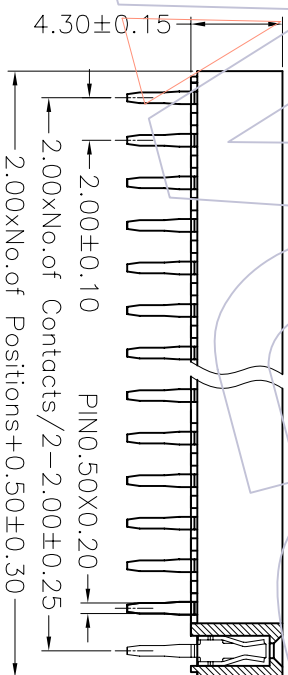

TYPE	PART NO.
TYPE 1	2243-2XXWXXCUNT1
TYPE 2	2243-2XXWXXCUNT2

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	WEIXD	SCALE	UNIT	PART NO.	TITLE:
A1	08/06/12	Changing P.C.B Layout			X.X	DESIGN	08/06/12	3:1	mm	SEE TABLE	FI2.00mm DUAL ROW CENTRE PITCH FOOT H=4.30
A0	08/02/12	NEW			X.XXX	CHECK		A4	1/1		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	CHECK		PROJ.	± 3'	Customer NO.	

WCON 维峰五金电子有限公司
WAVE HARDWARE ELECTRONICS CO. LTD