

# HSP



NOTES:  
 Current Rating: 2.0AMP  
 Withstand Voltage: 500V AC/DC  
 Contact Resistance: 20mΩ Max  
 Insulation Resistance: 1000MΩMin  
 Operation Temperature: -40°C to +105°C  
 Contact Material: Phosphor Bronze  
 Contact plating: Au or Sn over Ni  
 Insulator Material: PA6T+30%G, F UL94V-0

## Ordering Information


2246 - 2 XX C XX CUNT X

No. of Pins per ROW: 02-40PIN  
 Contact Plating: G1=3μ Gold  
 G2=5μ Gold  
 G3=10μ Gold  
 G4=15μ Gold  
 G5=30μ Gold  
 S1=Gold Flash/Tin  
 S2=5μ Gold/Tin  
 S3=10μ Gold/Tin  
 S4=15μ Gold/Tin  
 S5=30μ Gold/Tin  
 SN=Tin



Packaging: T=Tray  
 Series No. I=TYPE 1  
 Z=TYPE 2

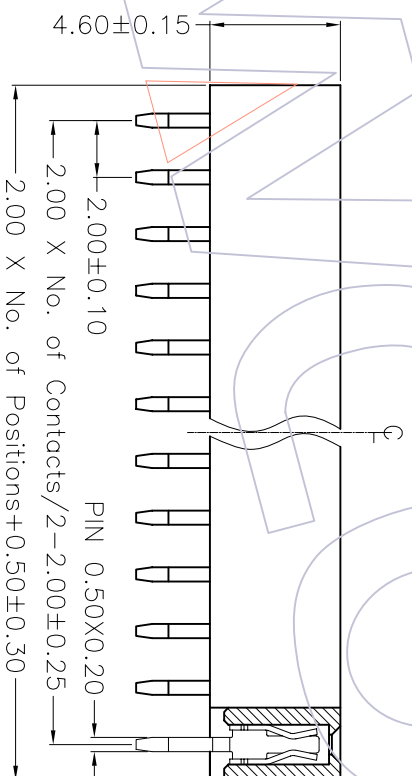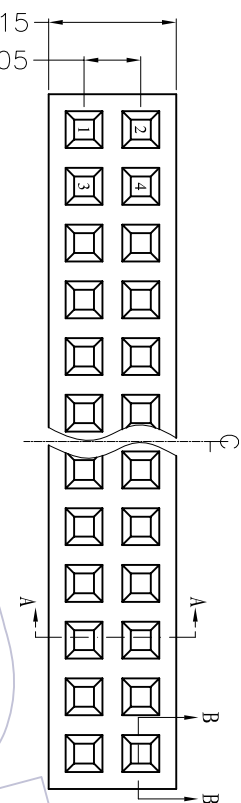

SECTION B-B

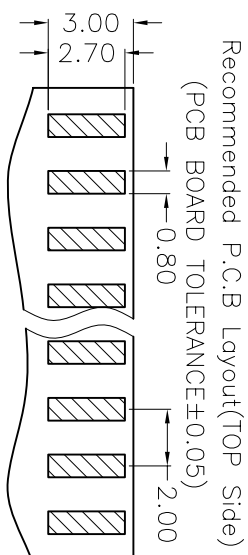

1.80 \ 1.60±0.05

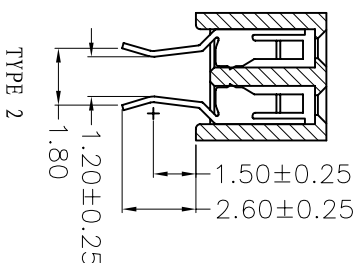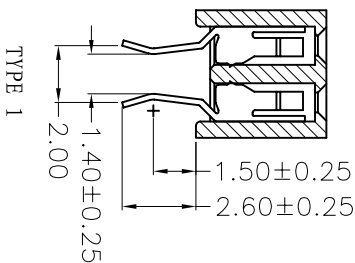

SECTION A-A

TYPE	PART NO.
TYPE 1	2246-2XXCXXCUNT1
TYPE 2	2246-2XXCXXCUNT2

**WCON** 维峰五金电子有限公司  
 WAVE HARDWARE ELECTRONICS CO. LTD

REV	DATE	MODIFICATION DESCRIPTION	CHANGE APPROVE	OPERATION	DRAW	SCALE	PART NO.
A0	08/02/28	NEW		X.X ±0.40	DESIGN	3:1	SEE TABLE
				X.XX ±0.25	CHECK	mm	
				X.XXX ±0.15	APPROVE	A4	
				Angle ± 3'		1/1	
				DIM TOL		PROJ.	Customer NO.

PH2.00mm Dual Splint H=4.6