

NUT



Part Blow Up

2.00mm HDD Socket, SMT Type

SPECIFICATIONS



Current Rating: 2.0AMP
 Contact Resistance: 30m Ω Max.
 Insulation Resistance: 1000M Ω Min.
 Withstanding Voltage :500V AC/Minute
 Operation Temperature: -55°C to+105°C
 Contact Phosphor Brass; Nut: Brass
 Contact plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Base: LCP+30%GF; Cover: LCP+30%GF

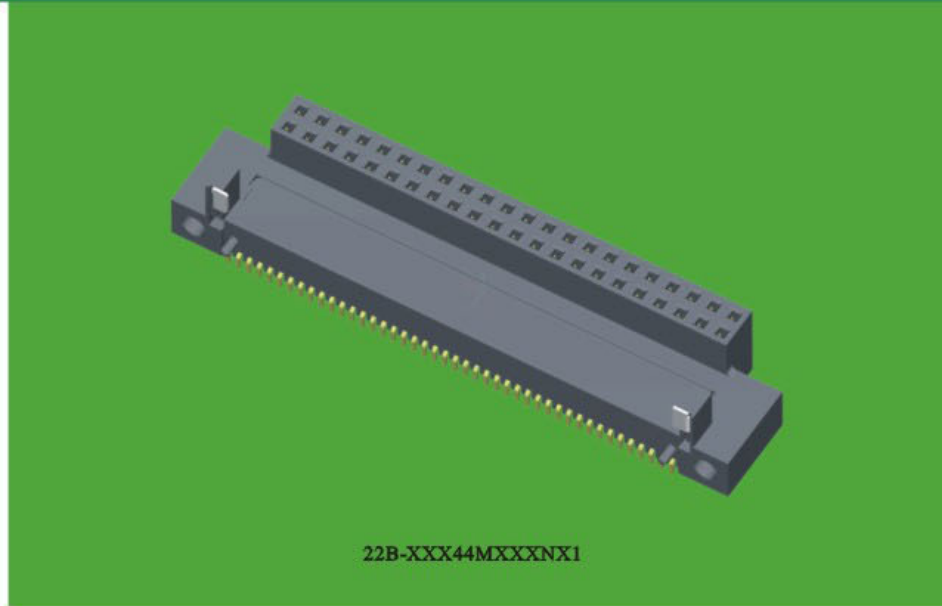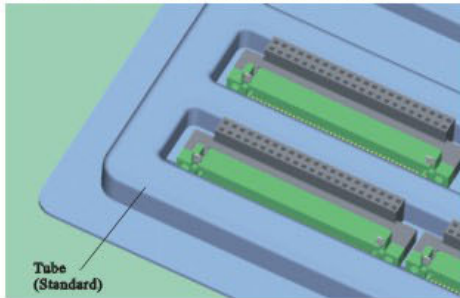

22B-XXX44MXXXNX1


22B-XXX 44 M XX X N X 1

THE DISTANCE OF CONNCTOR CENTER TO THE P.C.B
 075:H=7.5mm
 081:H=8.1mm
 086:H=8.60mm
 100:H=10.0mm

CONTACT PLATING
 G0:1u" Gold S0:1u" Gold/Tin
 G1:3u" Gold S1:3u" Gold/Tin
 G2:5u" Gold S2:5u" Gold/Tin
 G3:10u"Gold S3:10u"Gold/Tin
 G4:15u"Gold S4:15u"Gold/Tin
 G5:30u"Gold S5:30u"Gold/Tin
 G6:20u"Gold S6:20u"Gold/Tin
 SN:Tin

INSULATOR MATERIAL
 C:Nylon-6T
 D:LCP
 G:Nylon-9T

PACKING
 A:Troy T:Tube
 R:Tape & Reel

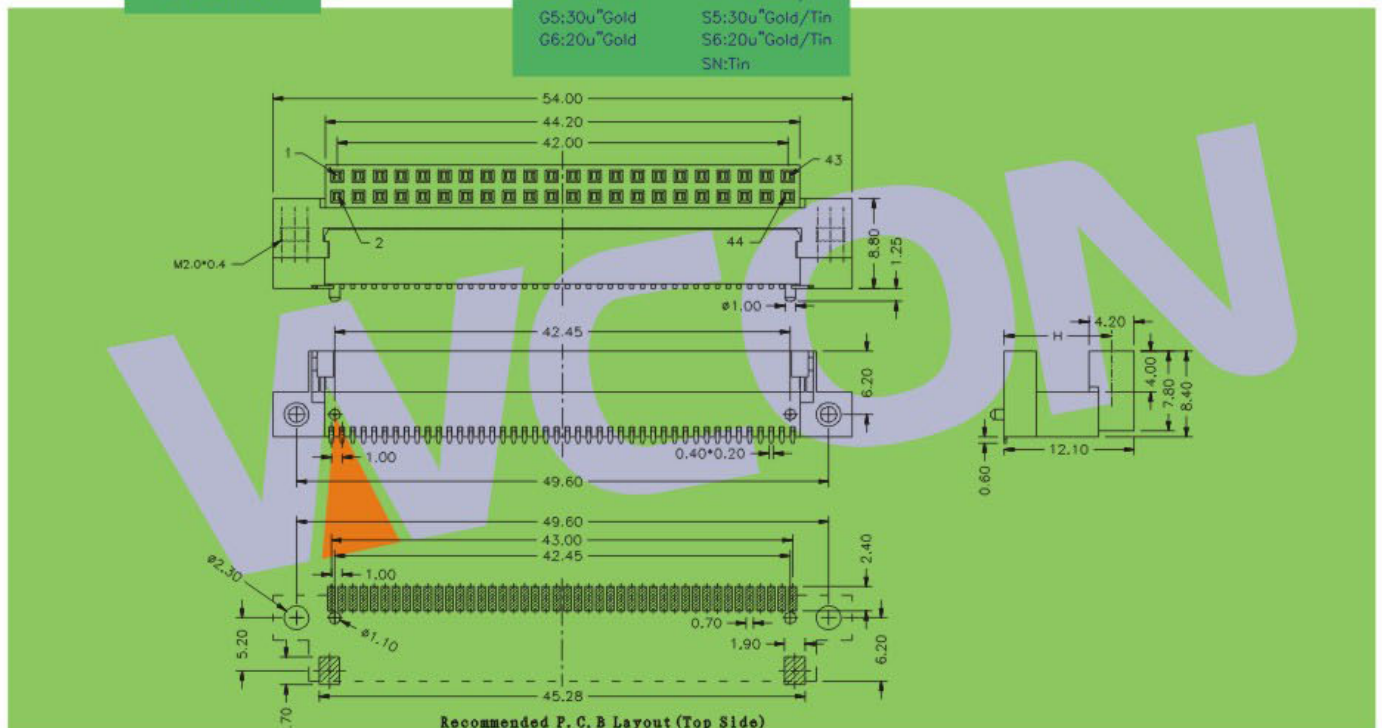

※INNOVATION AND DEVELOPMENT ※CONTINUAL IMPROVEMENT ※QUALITY FOREMOST ※CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418