
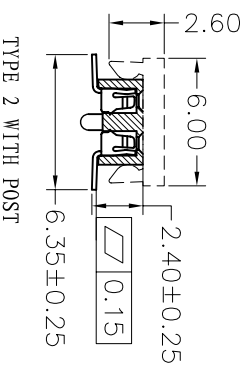

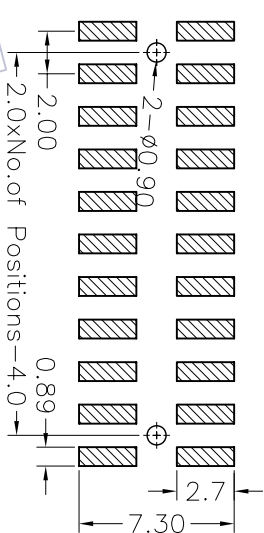


HSPF

NOTES:

Current Rating: 2.0AMP
 Withstand Voltage: 500V AC/DC
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩMin
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au or Sn over Ni
 Insulator Material: PA6T+30%G.F UL94V-0

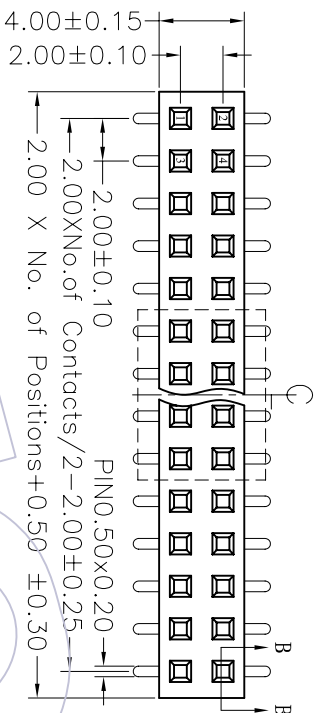

Ordering Information

2221 - 2 XX M XX CUNT X


No. of Pins per Row: 30-40Pin

Contact Plating: G0=Gold Flash, G1=3μ"Gold, G2=5μ"Gold, G3=10μ"Gold, G4=15μ"Gold, G5=30μ"Gold, S0=Gold Flash/Tin, S1=3μ"Gold/Tin, S2=5μ"Gold/Tin, S3=10μ"Gold/Tin, S4=15μ"Gold/Tin, S5=30μ"Gold/Tin, SN=1Tin

Packaging: T=Tube, R=Tray&Reel+CAP, P=Tray+CAP

Series No. 3=TYPE 1, 4=TYPE 2

SECTION B-B

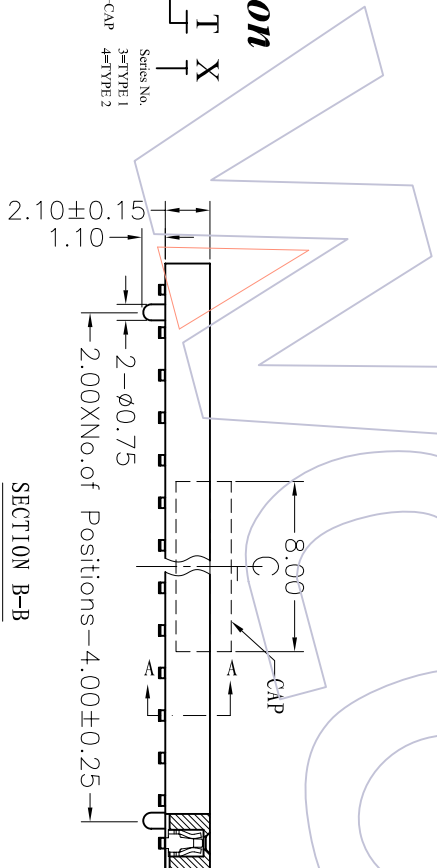

SECTION A-A

TYPE	PART NO.
TYPE 1	2221-2XXXXXCUNT3
TYPE 2	2221-2XXXXXCUNT4

WCON 维峰五金电子有限公司
 WAFER HARDWARE ELECTRONICS CO. LTD

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	SCALE	PART NO.	TITLE:
A0	08/02/28	NEW			X.X X.XX X.XXX	MeiLiQ 08.02.28	3:1 mm A4		SEE TABLE FH2.00mm Dual SMT IH=2.1
1					Angle DIM	CHECK APPROVE	1/1 PROJ.		Customer NO.