

HSP

NOTES:

Current Rating: 2.0AMP
 Withstand Voltage: 500V AC/DC
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩMin
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au or Sn over Ni
 Insulator Material: PA6T+30%G.F UL94V-0

Ordering Information





2228-2 XX S XX CUNT 1

No. of Pins per ROW: 2=40PIN

Contact Plating: T=Tube
 GO=Gold Flash
 G1=3μ"Gold
 G2=5μ"Gold
 G3=10μ"Gold
 G4=15μ"Gold
 G5=30μ"Gold

Packaging: R=Tube&Reel+CAP
 P=Tube+CAP

S0=Gold Flash/Tin
 S1=3μ"Gold/Tin
 S2=5μ"Gold/Tin
 S3=10μ"Gold/Tin
 S4=15μ"Gold/Tin
 S5=30μ"Gold/Tin
 SN=Tin

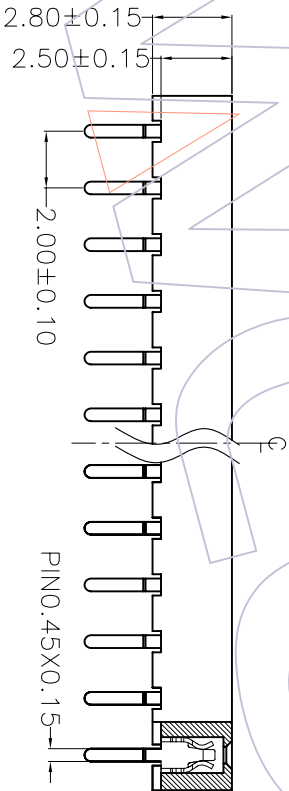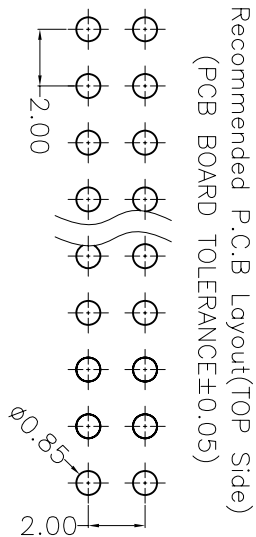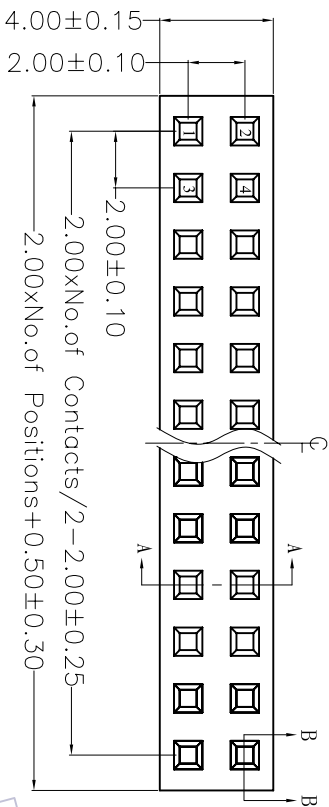

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	SCALE	PART NO.	TITLE:
A0	08/02/28	NEW			XXX XXX XXX Angle DIM	DESIGN CHECK APPROVE	3:1 mm A4 1/1	2228-2XXXXXCUNT1	PH2.00mm Dual 180° H=2.8

WCON 维峰五金电子有限公司
 WAFE HARDWARE ELECTRONICS CO.,LTD