
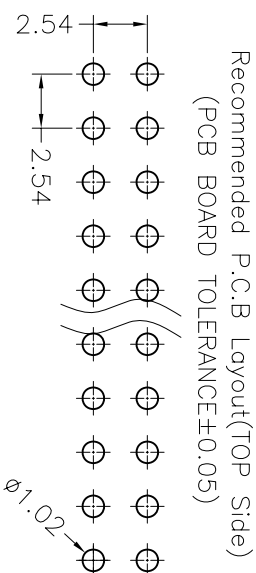


HSP

NOTES:

Current Rating: 3.0AMP
 Withstand Voltage: 500V AC/DC
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩMin
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au or Sn over Ni
 Insulator Material: PA6T or PBT+30%G.F UL94V-0

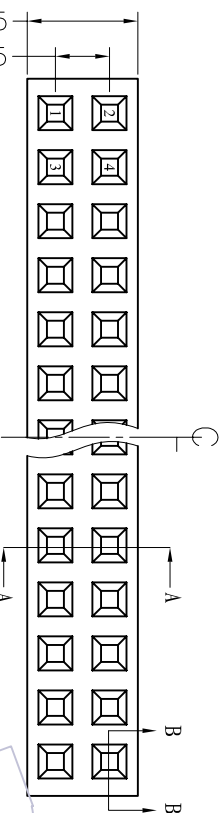

Ordering Information


2150-2XX SXX XUN X1

No. of Pins per ROW: 02-40PIN


Contact Plating: G=Gold Flash G1=3µ"Gold G2=5µ"Gold G3=10µ"Gold G4=15µ"Gold G5=30µ"Gold S0=Gold Flash/Tin S1=3µ"Gold/Tin S2=5µ"Gold/Tin S3=10µ"Gold/Tin S4=15µ"Gold/Tin S5=30µ"Gold/Tin SN=Tin

Insulator: A=PBT C=PA6T

Packing: T=Tube

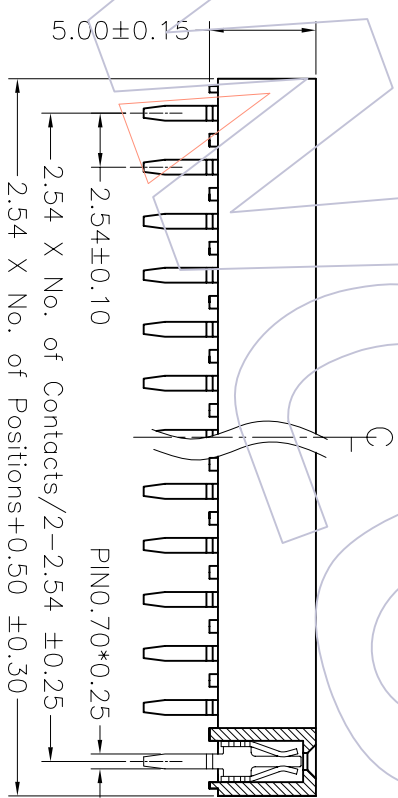

SECTION: B-B



SECTION: A-A

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	WEIXD	SCALE	PART NO.	TITLE:
A0	08/03/10	NEW			XXX ±0.40 XXX ±0.25 XXX ±0.15	DESIGN CHECK		4:1 mm A4	2150-2XXSXXUNX1	FH2.54 DUAL 180° H=5.0
1					Angle ± 3'	APPROVE		PROJ.	Customer NO.	

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO. LTD