

HSP

NOTES:

Current Rating: 3.0AMP
 Withstand Voltage: 500V AC/DC
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩMin
 Operation Temperature: -40C to +105C

Contact Material: Phosphor Bronze
 Contact plating: Au or Sn over Ni
 Insulator Material: PA6T or PBT+30%G.F.(UL94V-0)

Ordering Information

2150 - 2 XX W XX X UN X 2




No. of Pins per ROW: 42-40PIN

Contact Plating:
 G0=Gold Flash
 G1=3µ"Gold
 G2=5µ"Gold
 G3=10µ"Gold
 G4=15µ"Gold
 G5=30µ"Gold


Insulator:
 A=PBT
 C=PA6T

Packing:
 T=Tube

SN=Gold Flash/Tin
 S1=3µ"Gold/Tin
 S2=5µ"Gold/Tin
 S3=10µ"Gold/Tin
 S4=15µ"Gold/Tin
 S5=30µ"Gold/Tin
 SN=Tin

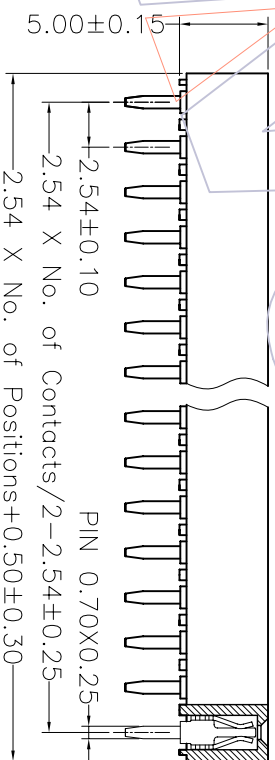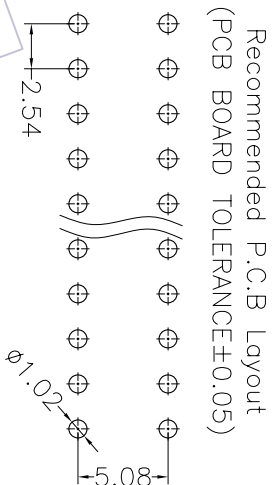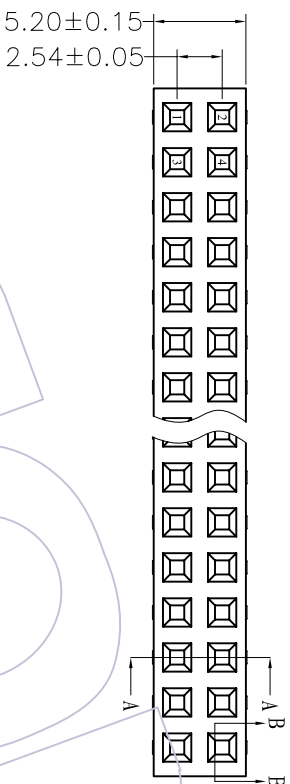

SECTION: B-B



SECTION: A-A

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	WEIXD	SCALE	UNIT	PART NO.	TITLE:
A0	08/03/01	NEW			X.X ±0.40	DESIGN	08.03.11	2.5:1	mm	2150-2XXWXXXUNX2	FH2.54 DUAL Centipede H=5.0
					X.XX ±0.25	CHECK			A4		
					Angle ± 3'	APPROVE			1/1		
					DIM TOL	PROU.				Customer NO.	

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO. LTD