

HSHF

NOTES:

Current Rating: 3.0AMP
 Withstand Voltage: 500V AC/DC
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩMin
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au or Sn over Ni
 Insulator Material: PA6T or PBT+30%G.F UL94V-0

Ordering Information



2150 - 2 XX W XX X UN X 3

Notes Pins per ROW: 42-40PIN


Contact Plating:
 G0=Gold Flash
 G1=3µ"Gold
 G2=5µ"Gold
 G3=10µ"Gold
 G4=15µ"Gold
 G5=30µ"Gold
 S0=Gold Flash/Tin
 S1=3µ"Gold/Tin
 S2=5µ"Gold/Tin
 S3=10µ"Gold/Tin
 S4=15µ"Gold/Tin
 S5=30µ"Gold/Tin
 SN=Tin

Insulator:
 A=PBT
 C=PA6T


Packing:
 T=Tube

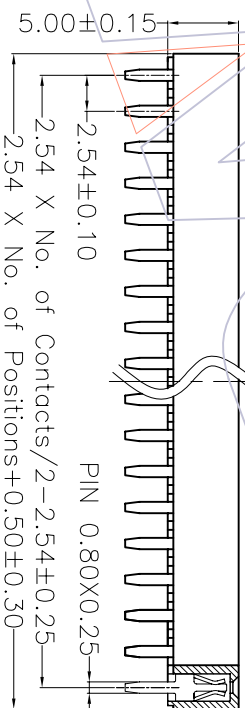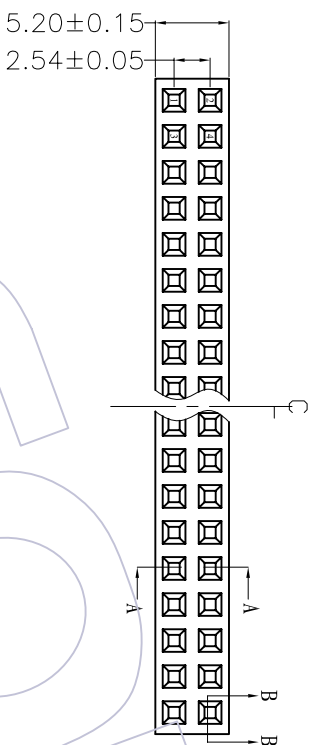

SECTION: B-B

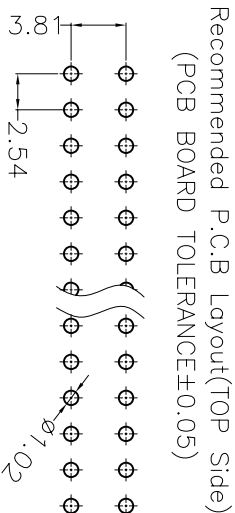

Recommended P.C.B Layout(TOP Side)
 (PCB BOARD TOLERANCE±0.05)



SECTION: A-A

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		DRAW	WEIXD	08.03.11	SCALE		PART NO.	TITLE:
					X.XX	±0.40				UNIT	4:1		
A0	08/03/01	NEW			X.XX	±0.25	DESIGN			mm	A4	2150-2XXWXXXUNX3	FH2.54 DUAL Centipede H=5.0
					X.XXX	±0.15	CHECK				1/1		
					Angle	± 3'	APPROVE					Customer NO.	

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO. LTD