





HSP

NOTES:

Current Rating: 3.0AMP
 Withstand Voltage: 500V AC/DC
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩMin
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze or Brass
 Contact plating: Au or Sn over Ni
 Insulator Material: PA6T or PBT+30%G.F UL94V-0

Recommended P.C.B Layout(TOP Side)
 (PCB BOARD TOLERANCE±0.05)

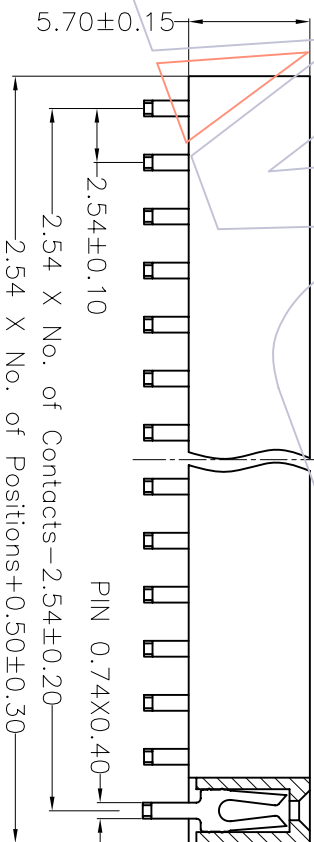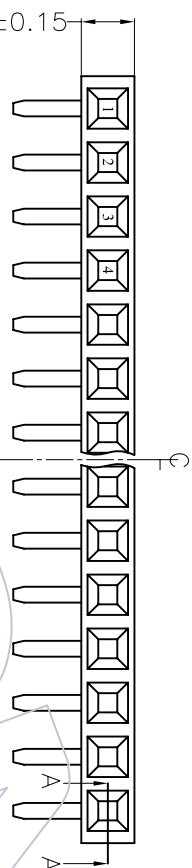

Ordering Information

2157-1XX R XX X Y N A 1

No. of Pins per ROW: 02-40PIN
 Contact Plating: G0=Gold Flash, G1=3μ"Gold, G2=5μ"Gold, G3=10μ"Gold, G4=15μ"Gold, G5=30μ"Gold, S0=Gold Flash/Tin, S1=3μ"Gold/Tin, S2=5μ"Gold/Tin, S3=10μ"Gold/Tin, S4=15μ"Gold/Tin, S5=30μ"Gold/Tin, SN=Tin
 Insulator: A=BT, C=PA6T
 Packing: A=Tray, T=Tube

SECTION: A-A

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	WEIXD	08.03.11	SCALE	4:1	 维峰五金电子有限公司 WAVE HARDWARE ELECTRONICS CO.,LTD	PART NO.	2157-1XXRXXYYNA1
A0	08/03/11	NEW			X.X	DESIGN		UNIT	mm	A4		TITLE:	FH2.54 SINGLE 90° H=5.7
					X.XXX	CHECK		SIZE	1/1	PROJ.	Customer NO.		
					Angle	APPROVE							
					± 3'								