

HSF

NOTES:

Current Rating: 3.0AMP
 Withstand Voltage: 500V AC/DC
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩMin
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze or Brass
 Contact plating: Au or Sn over Ni
 Insulator Material: PA6T or PBT+30%G. F UL94V-0


Ordering Information

2157-2XX SXX XYN A1


No.of Pins per ROW:02-40PIN
 Contact Plating: GP=Gold Flash
 GH=3μ"Gold
 GQ=5μ"Gold
 G3=10μ"Gold
 G4=15μ"Gold
 G5=30μ"Gold
 S0=Gold Flash/Tin
 S1=3μ"Gold/Tin
 S2=5μ"Gold/Tin
 S3=10μ"Gold/Tin
 S4=15μ"Gold/Tin
 S5=30μ"Gold/Tin
 SN=Tin

Insulator: A=PBT
 C=PA6T
 T=Tube

Packing: A=Tray
 T=Tube

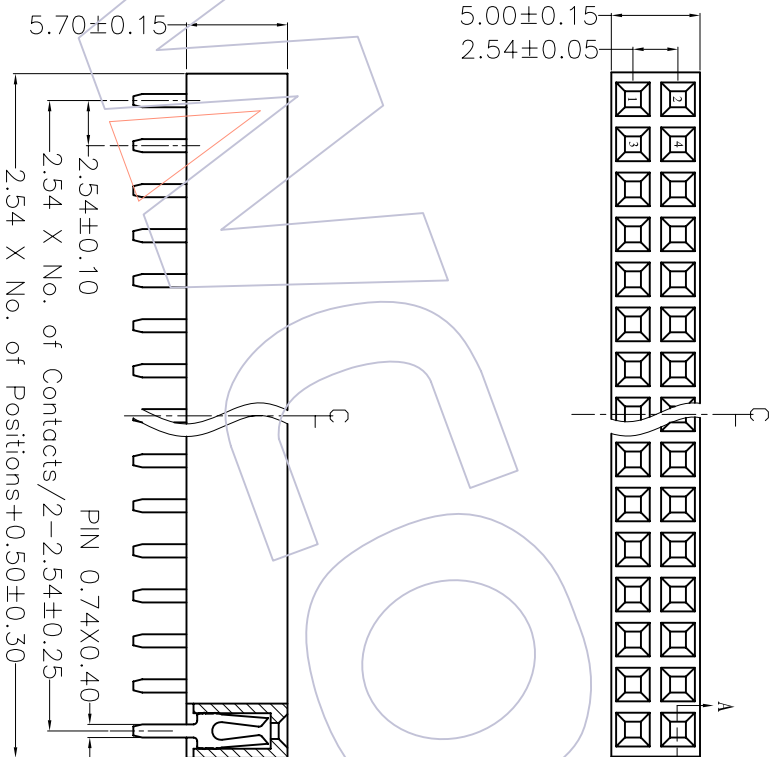

SECTION: A-A

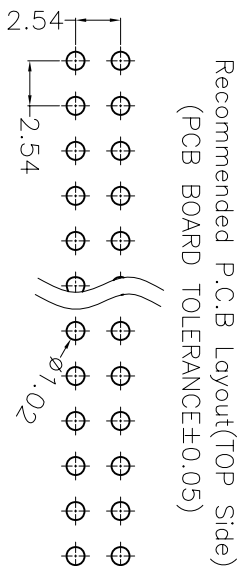

Recommended P.C.B Layout(TOP Side)
 (PCB BOARD TOLERANCE±0.05)

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		DRAW	WEIXD	SCALE		PART NO.	TITLE:
					XXX	±0.40			UNIT	mm		
A0	08/03/11	NEW			XXX	±0.25	DESIGN		A4		2157-2XXSXXYYNA1	FH2.54 DUAL 180° H=5.7
					Angle	±.3'	CHECK					
					DIM	TOL	APPROVE					

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO.,LTD