

HSHF

NOTES:

Current Rating: 3.0AMP
 Withstand Voltage: 500V AC/DC
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩMin
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au or Sn over Ni
 Insulator Material: PA6T or PBT+30%G.F UL94V-0

Ordering Information

2168T - 2 XX S XX X UN T I




No. of Pins per ROW:02-40PIN

Contact Plating:
 CO=Gold Flash
 GI=5μ"Gold
 G2=5μ"Gold
 G3=10μ"Gold
 G4=15μ"Gold
 G5=0μ"Gold


Insulator:
 A=PBT
 C=PA6T

Packing:
 T=Tube

Plating:
 S0=Gold Flash/Tm
 S1=3μ"Gold/Tm
 S2=5μ"Gold/Tm
 S3=10μ"Gold/Tm
 S4=15μ"Gold/Tm
 S5=0μ"Gold/Tm
 SN=Tm

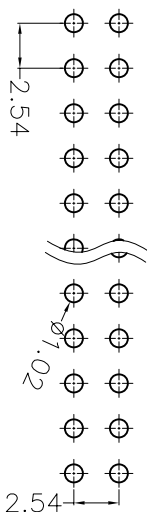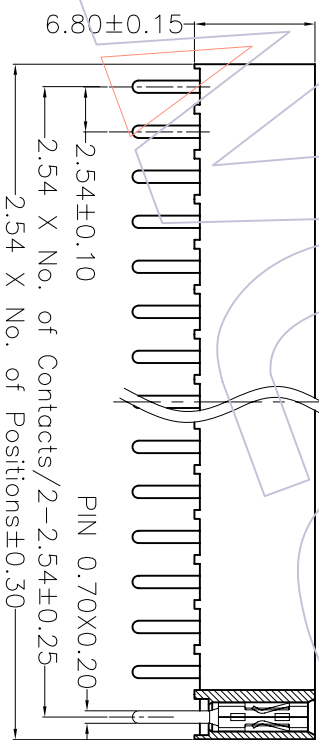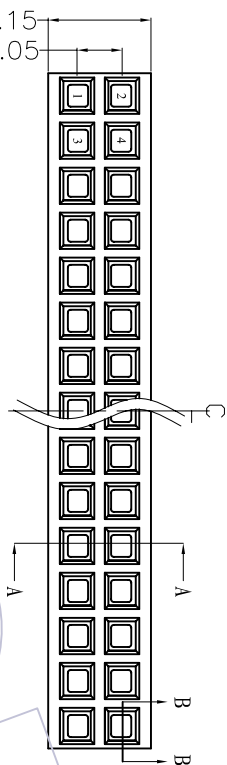

Recommended P.C.B Layout(TOP Side)
 (PCB BOARD TOLERANCE±0.05)



SECTION: B-B

SECTION: A-A

OPERATION	DRAW	WEIXD	08.03.12	SCALE	2.5:1	 WCON 维峰五金电子有限公司 WAFER HARDWARE ELECTRONICS CO.,LTD	PART NO.	2168T-2XXSXXXUNT1
DESIGN	CHECK	APPROVE	ANGLE	± 3'	SHEET		1/1	TITLE:
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	PROJ.	Customer NO.
A0	08/03/12	NEW						
1								