
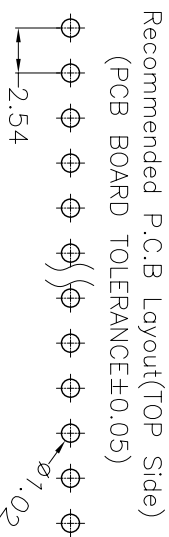

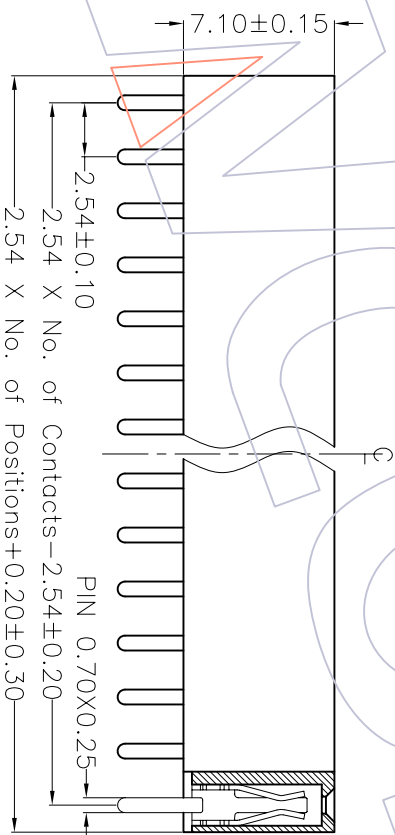


HSHF

NOTES:

Current Rating: 3.0AMP
 Withstand Voltage: 500V AC/DC
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩMin
 Operation Temperature: -40°C to +105°C
 Contact Material: Phosphor Bronze
 Contact plating: Au or Sn over Ni
 Insulator Material: PA6T or PBT+30%G.F UL94V-0

Recommended P.C.B Layout(TOP Side)
 (PCB BOARD TOLERANCE±0.05)

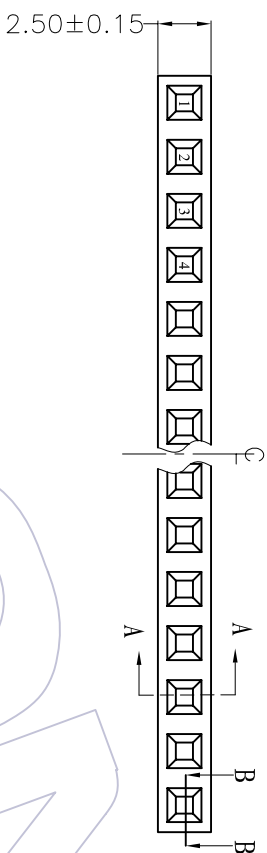


Ordering Information


2171-1XX SXX XUNT1

No. of Pins per ROW: 02-40PIN
 Contact Plating: G=Gold Flash
 G1=5μr/Gold
 G2=5μr/Gold
 G3=10μr/Gold
 G4=15μr/Gold
 G5=30μr/Gold
 S0=Gold Flash/Tin
 S1=5μr/Gold/Tin
 S2=5μr/Gold/Tin
 S3=10μr/Gold/Tin
 S4=15μr/Gold/Tin
 S5=30μr/Gold/Tin
 SN=Tin

Insulator: A=PBT
 C=PA6T
 Packing: T=Tube

SECTION: B-B

SECTION: A-A

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	WEIXD	08.03.12	SCALE	4:1	 维峰五金电子有限公司 WAVE HARDWARE ELECTRONICS CO.,LTD	PART NO.	2171-1XXSXXUNT1
A0	08/03/12	NEW			XXX ±0.40 XXX ±0.25 XXX ±0.15	DESIGN CHECK		UNIT SIZE	mm A4			TITLE:	PH2.54 SINGLE 180° H=7.1
					Angle ± 3'	CHECK		SHEET	1/1		Customer NO.		

H 1 2 3 4 5 6 7 8 9 10

G 1 2 3 4 5 6 7 8 9 10