

HSE

NOTES:

Current Rating: 3.0AMP
 Withstand Voltage: 500V AC/DC
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩMin
 Operation Temperature: -40°C to +105°C
 Contact Material: Phosphor Bronze or Brass
 Contact plating: Au or Sn over Ni
 Insulator Material: PA6T+30%G, F UL94V-0





Ordering Information

2157 - 2 XX M XX C Y N X 1

No. of Pins per ROW: 02-40PIN

Contact Plating:
 G0=Gold Flash
 G1=3μ" Gold
 G2=50μ" Gold
 G3=10μ" Gold
 G4=15μ" Gold
 G5=50μ" Gold
 S0=Gold Flash/Tin
 S1=3μ" Gold/Tin
 S2=50μ" Gold/Tin
 S3=10μ" Gold/Tin
 S4=15μ" Gold/Tin
 S5=50μ" Gold/Tin
 SN=Tin

Packing:
 T=Tube
 P=Tube+CAP
 R=Tube&Reel+CAP

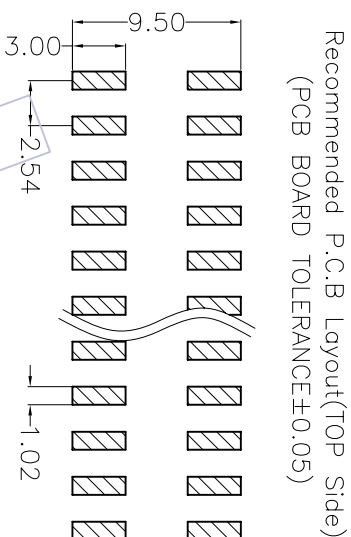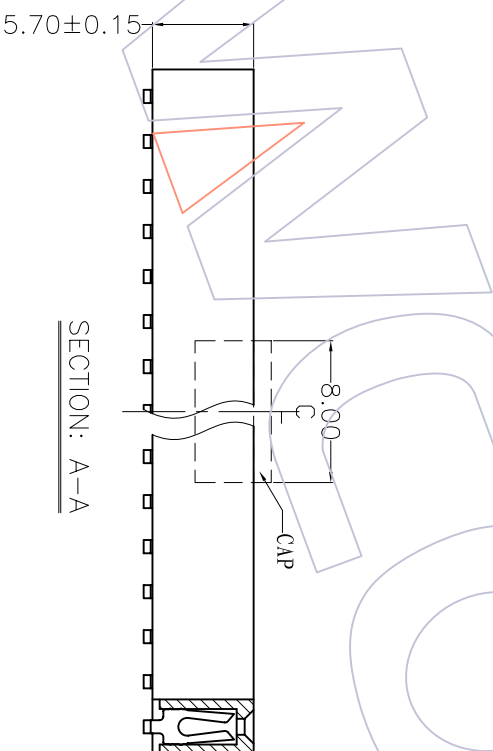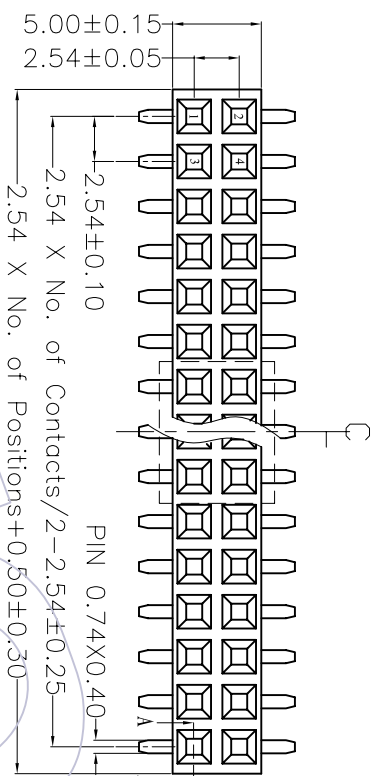

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	WEIXD	08.03.11	SCALE	2.5:1	 WCON 维峰五金电子有限公司 WAFER HARDWARE ELECTRONICS CO.,LTD	PART NO.	2157-2XXMXXCYNX1
A0	08/03/11	NEW			XXX ±0.40 XXX ±0.25 XXX ±0.15 Angle ± 3'	DESIGN CHECK			UNIT mm SIZE A4 SHEET 1/1	PROJ.		TITLE: Customer NO.	FH2.54 DUAL SMT H=5.7

H 1 2 3 4 5 6 7 8 9 10

G 1 2 3 4 5 6 7 8 9 10

F 1 2 3 4 5 6 7 8 9 10

E 1 2 3 4 5 6 7 8 9 10

D 1 2 3 4 5 6 7 8 9 10

C 1 2 3 4 5 6 7 8 9 10

B 1 2 3 4 5 6 7 8 9 10

A 1 2 3 4 5 6 7 8 9 10