WCON®
HTTP:WWW.WAFE-CHINA.COM



2285E-1XXWXXDUNXX



2285E-2XXWXXDUNXX

2.54mm Female Header, Single/Dual Row

SPECIFICATIONS

FILE NO.E246993

Current Rating: 3.0AMP
Contact Resistance: 20mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage : 1000V AC/Minute
Operation Temperature: −40℃ to+105℃
Contact Material: Phosphor Bronze
Contact plating: Au or Sn Over Ni
Insulator Material: Polyester (UL94V−0)
Standard: LCP+30%GF

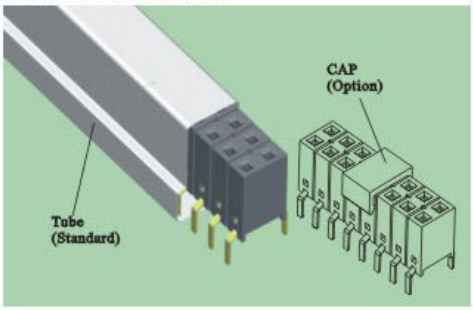

TERMINAL

2185E-1XXSXXDUNXX



2185E-2XXSXXDUNXX

2185E-X XX X XX D UN X X

- PREDITION BREAKING
- NO.OF ROW: 1:Single Row; 2:Dual Row
- NO.OF PINS PER ROW: 02~40P
- CONTACT SHAPE: S:Straight; W:Centipede Feet
- CONTACT PLATING:
  - G0:1u" Gold / S0:1u" Gold/Tin
  - G1:3u" Gold / S1:3u" Gold/Tin
  - G2:5u" Gold / S2:5u" Gold/Tin
  - G3:10u"Gold / S3:10u"Gold/Tin
  - G4:15u"Gold / S4:15u"Gold/Tin
  - G5:30u"Gold / S5:30u"Gold/Tin
  - G6:20u"Gold / S6:20u"Gold/Tin
  - SN:Tin
- PACKING: T:Tube; R:Tape & Reel

SINGLE ROW

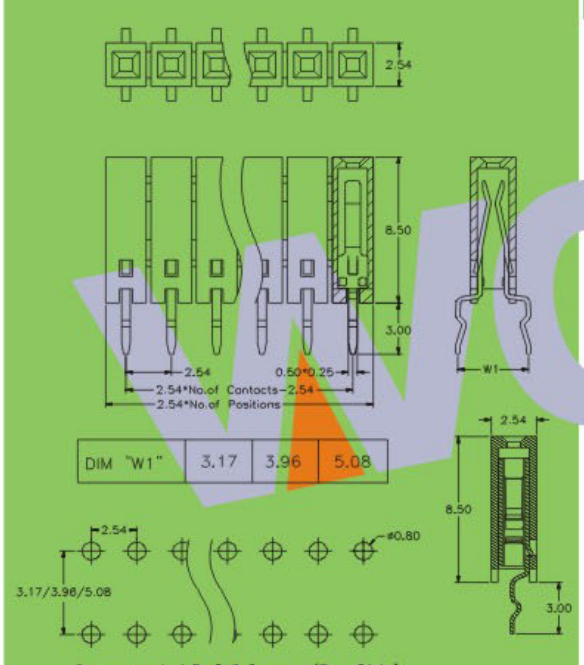

DIM "W1"	3.17	3.96	5.08

Recommended P.C.B Layout (Top Side)

DUAL ROW

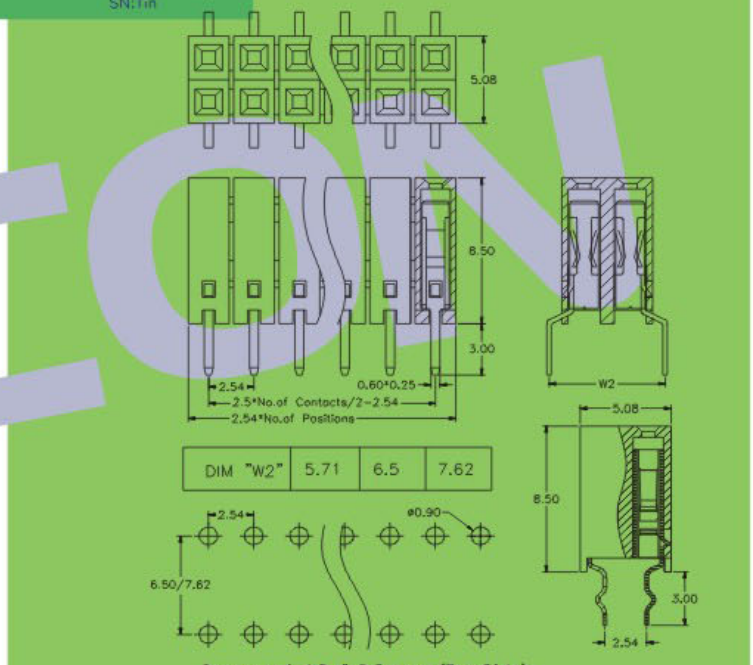

DIM "W2"	5.71	6.5	7.62

Recommended P.C.B Layout (Top Side)

※ ※INNOVATION AND DEVELOPMENT ※ ※CONTINUAL IMPROVEMENT ※ ※QUALITY FOREMOST ※ ※CUSTOMER SATISFACTION ※ ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com
WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920
WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418