



2185-1XXMXXXYNX1





2185-1XXMXXXYNX2

2. 54mm Female Header, Single/Dual Row

SPECIFICATIONS


Current Rating: 3.0AMP
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage :1000V AC/Minute
 Operation Temperature: -40°C to+105°C
 Contact Material: Brass/Phosphor Bronze
 Contact plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T+30%GF

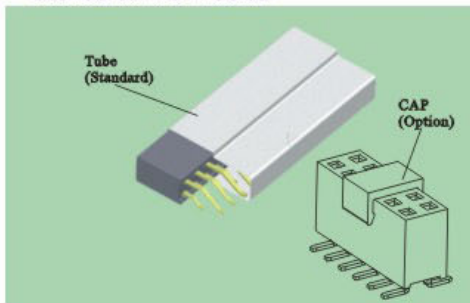

2185-1XXZXXXYNX1



2185-2XXZXXXYNX1



2185-2XXMXXXYNX1

2185-X XX X XX X YN X X

NO. OF ROW
 1: Single Row
 2: Dual Row



NO. OF PINS
 PER ROW
 02~40P

CONTACT SHAPE
 M: 180°SMT
 Z: 90°SMT

CONTACT PLATING
 G0: 1u" Gold
 G1: 3u" Gold
 G2: 5u" Gold
 G3: 10u" Gold
 G4: 15u" Gold
 G5: 30u" Gold
 G6: 20u" Gold
 S0: 1u" Gold/Tin
 S1: 3u" Gold/Tin
 S2: 5u" Gold/Tin
 S3: 10u" Gold/Tin
 S4: 15u" Gold/Tin
 S5: 30u" Gold/Tin
 S6: 20u" Gold/Tin
 SN: Tin

INSULATOR MATERIAL
 C: PA6T
 D: LCP

PACKING
 T: Tube
 R: Tape & Reel
 P: Tube+CAP

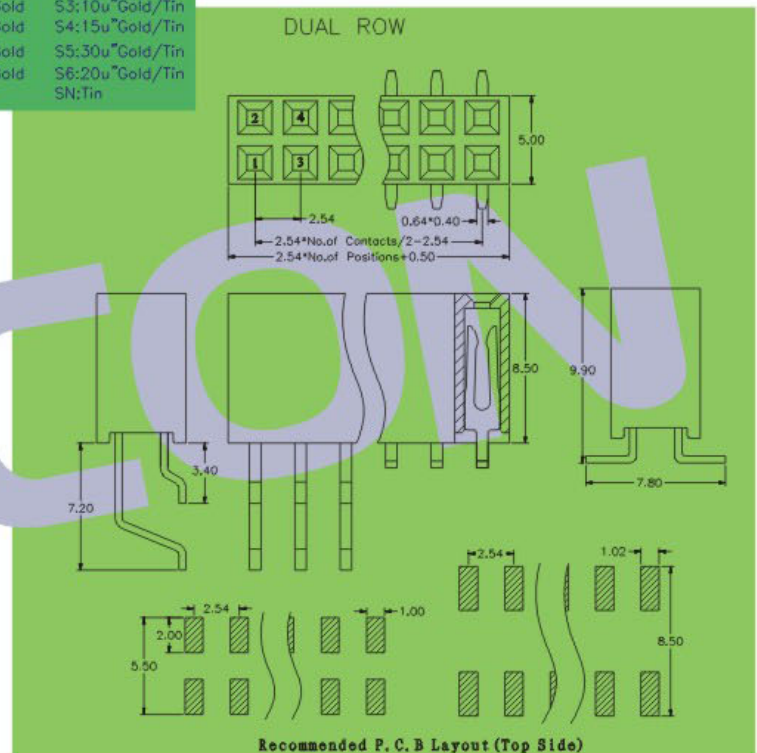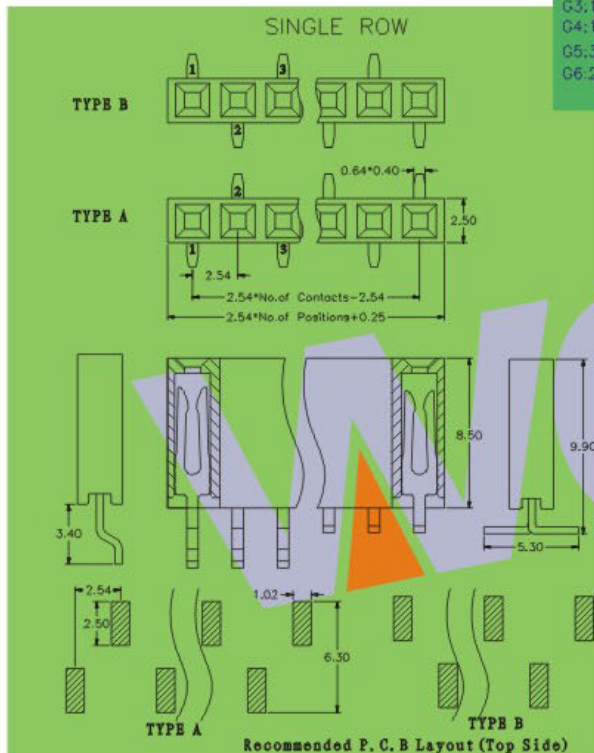

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418