



2.54mm Female Header, Triple Row

SPECIFICATIONS

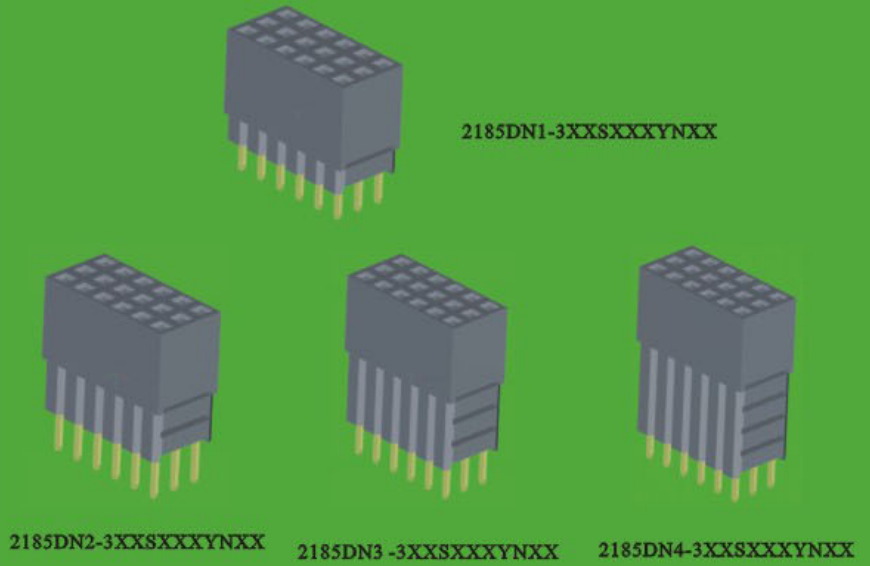



Current Rating: 3.0AMP
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage :1000V AC/Minute
 Operation Temperature: -40°C to +105°C
 Contact Material: Brass/Phosphor Bronze
 Contact plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PBT+30%GF

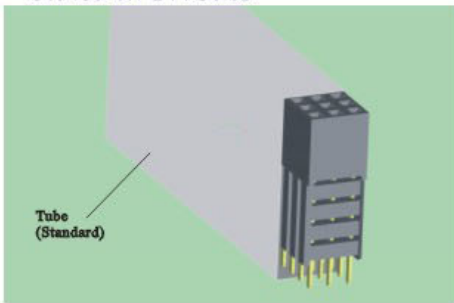

2185DNX-3 XX S XX X YN X X

- NO.OF WITH HOUSING**
 1: Add 1 Housing
 2: Add 2 Housing
 3: Add 3 Housing
 4: Add 4 Housing
- NO.OF PINS PER ROW**
 02~40P
- CONTACT PLATING**
 G0:1u" Gold S0:1u" Gold/Tin
 G1:3u" Gold S1:3u" Gold/Tin
 G2:5u" Gold S2:5u" Gold/Tin
 G3:10u"Gold S3:10u"Gold/Tin
 G4:15u"Gold S4:15u"Gold/Tin
 G5:30u"Gold S5:30u"Gold/Tin
 G6:20u"Gold S6:20u"Gold/Tin
 SN:Tin
- INSULATOR MATERIAL**
 A:PBT
 C:PA6T
 D:LCP
- PACKING**
 A:Troy T:Tube

Part No.	With No.of Housing	DIM "H"	DIM "A"		
2185DN1-3XXSXXXYNXX	1	11.05	2.30	7.35	12.2
2185DN2-3XXSXXXYNXX	2	13.59	4.85		9.65
2185DN3-3XXSXXXYNXX	3	16.13	2.30		7.10
2185DN4-3XXSXXXYNXX	4	18.67			4.60

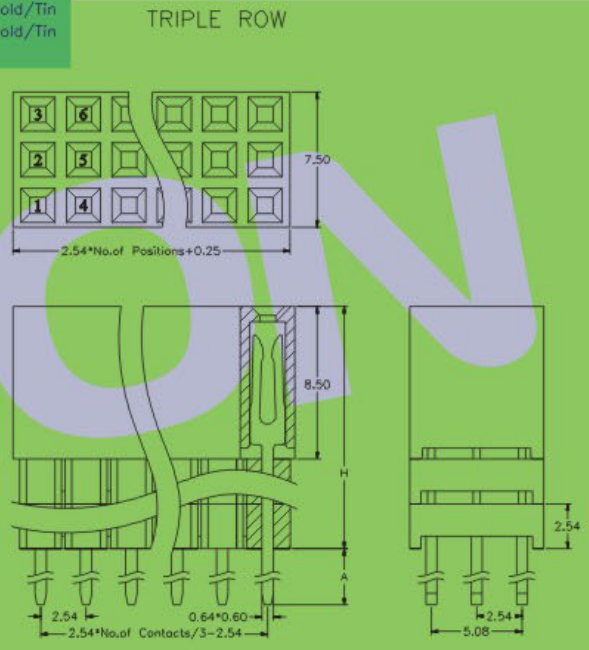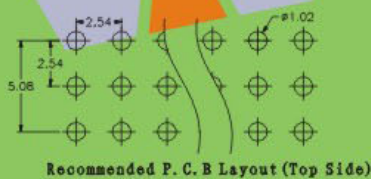

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418