

HSHF

NOTES:

Current Rating: 3.0AMP
 Withstand Voltage: 500V AC/DC
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩMin
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze or Brass
 Contact plating: Au or Sn over Ni
 Insulator Material: PA6T+30%G. F UL94V-0


Ordering Information

2157 - 2 XX C XX C Y N T 1

No. of Pins per Row: 52=40Pin



Contact Plating:
 GO=Gold Flash
 GH=3μ"Gold
 GS=5μ"Gold
 G3=10μ"Gold
 GE=15μ"Gold
 GS=30μ"Gold
 SO=Gold Flash/Tin
 SI=3μ"Gold/Tin
 S2=5μ"Gold/Tin
 S3=10μ"Gold/Tin
 S4=15μ"Gold/Tin
 S5=30μ"Gold/Tin
 SN=Tin

Packing:
 T=Tube

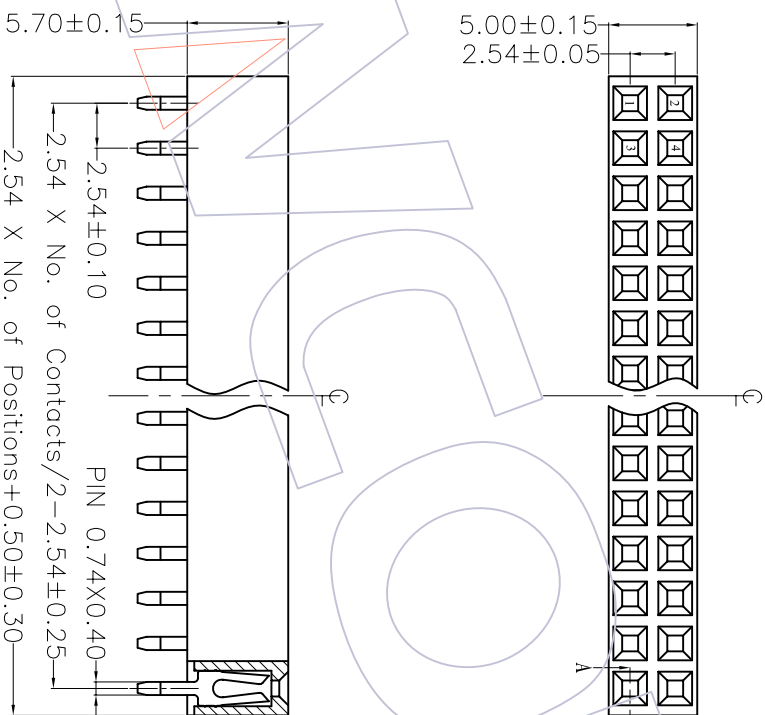

SECTION: A-A

Recommended P.C.B Layout(TOP Side)
 (PCB BOARD TOLERANCE±0.05)

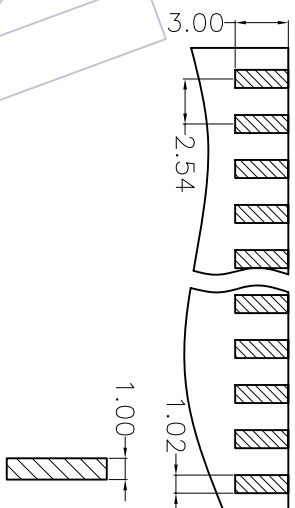

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	WEIXD	SCALE	PART NO.	TITLE:
A0	08/03/11	NEW			XXX XXX XXX	DESIGN CHECK	08.03.11	3:1 mm A4	2157-2XXCXXCYNT1	FH2.54 DUAL SPLINT H=5.7
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle DIM	CHECK APPROVE		UNIT SIZE SHEET PROJ.		
1					± 3'			1/1	Customer NO.	

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO. LTD