

HSF

NOTES:





Current Rating: 3.0AMP
 Withstand Voltage: 500V AC/DC
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩMin
 Operation Temperature: -40°C to +105°C
 Contact Material: Phosphor Bronze
 Contact plating: Au or Sn over Ni
 Insulator Material: LCP+30%G.F UL94V-0

Ordering Information

2180-3 36 S XX D UN T1

Contact Plating:
 G1=Gold Flash
 G2=3μ Gold
 G3=5μ Gold
 G4=10μ Gold
 G5=50μ Gold
 G6=30μ Gold
 S1=Gold Plating
 S2=3μ Gold/Tin
 S3=10μ Gold/Tin
 S4=50μ Gold/Tin
 S5=30μ Gold/Tin
 SN=Tin

Packing:
 T=Tube

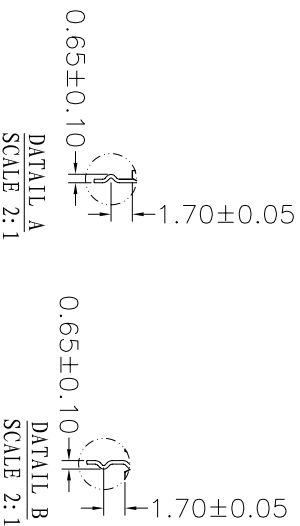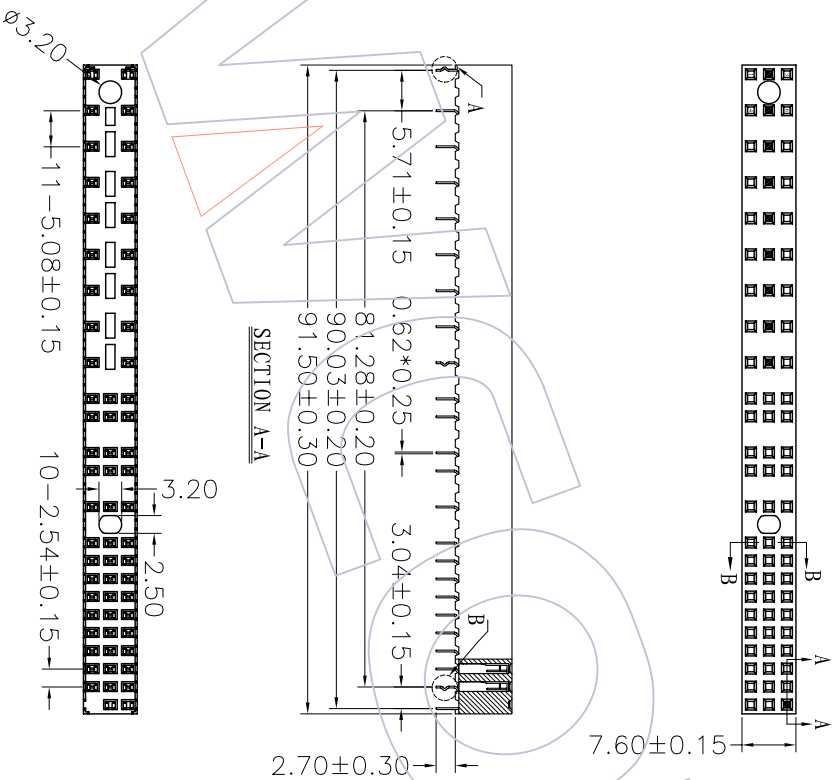

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	WEIXD	SCALE	UNIT	PART NO.	TITLE:
A0	08/03/12	NEW			XX ±0.40	DESIGN	08.03.12	1:1	mm	2180-336SXXDUNT1	WAPE HARDWARE ELECTRONICS CO. LTD
					X.XXX ±0.25	CHECK			A4		
					X.XXX ±0.15	CHECK			1/1	2.54mm	THREE ROWS FEMALE HEADER 180° H=8.0
					Angle ± 3°	APPROVE			PROJ.		
					DM						

WCON 维峰五金电子有限公司
 WAPE HARDWARE ELECTRONICS CO. LTD

2180-336SXXDUNT1

2.54mm THREE ROWS FEMALE HEADER 180° H=8.0