

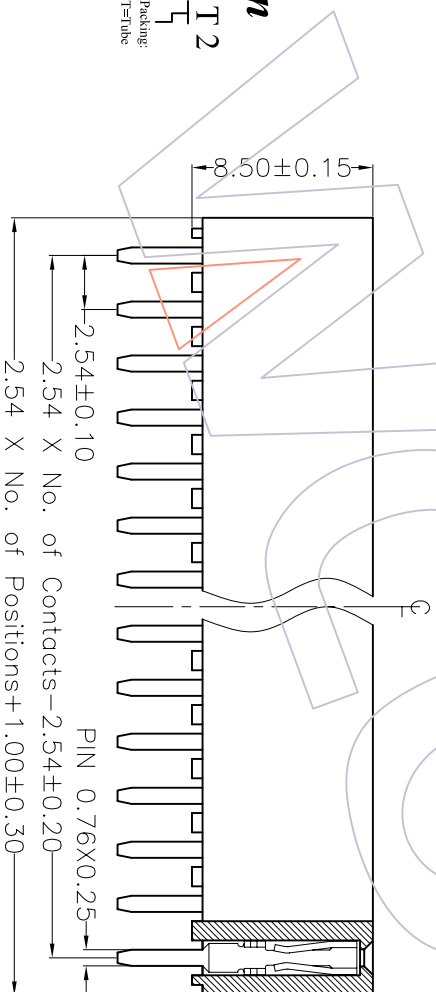
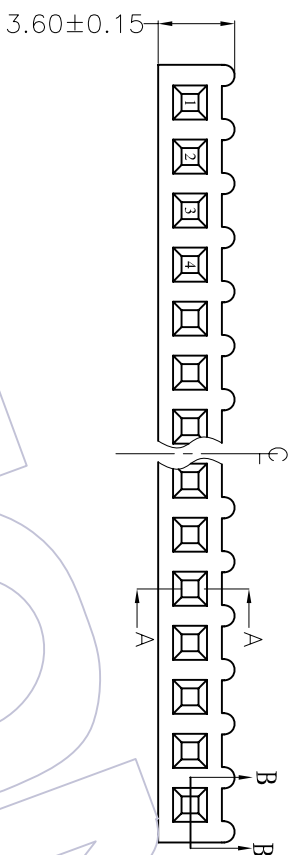


HSP

NOTES:

Current Rating: 3.0AMP
 Withstand Voltage: 500V AC/DC
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩMin
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au or Sn over Ni
 Insulator Material: PA6T or PBT+30%G.F UL94V-0

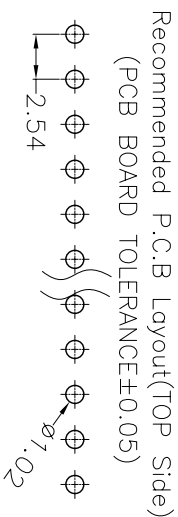

Ordering Information

2185-1XX SXX X UN T2

No. of Pins per ROW: 02-40PIN
 Contact Plating: GO=Gold Flash
 GI=3μ"Gold
 GS=5μ"Gold
 G3=10μ"Gold
 G4=15μ"Gold
 G5=30μ"Gold
 S0=Gold Flash/Tin
 S1=3μ"Gold/Tin
 S2=5μ"Gold/Tin
 S3=10μ"Gold/Tin
 S4=15μ"Gold/Tin
 S5=30μ"Gold/Tin
 SN=Tin

Insulator: A=PBT
 C=PA6T

Packing: T=Tube

SECTION: B-B

SECTION: A-A

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		DRAW	WEIXD	08.03.12	SCALE		PART NO.	TITLE:
					XXX	±0.40				UNIT	4:1		
A0	08/03/01	NEW			XXX	±0.25	DESIGN			mm	A4	2185-1XXSXXXUNT2	2185-1XXSXXXUNT2
					X.XXX	±0.15	CHECK				1/1	FH2.54 SINGLE 180° H-8.5 Wave TYPE	
					Angle	± 3'	APPROVE					Customer NO.	

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO.,LTD