

HSP

NOTES:


Current Rating: 3.0AMP
 Withstand Voltage: 500V AC/DC
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩMin
 Operation Temperature: -40°C to +105°C
 Contact Material: Phosphor Bronze or Brass
 Contact plating: Au or Sn over Ni
 Insulator Material: PA6T+30%G, F UL94V-0

Ordering Information


2185 - 1 XX Z XX C Y N T 1

Node Pins per ROW:02-407N
 Contact Plating: GI=3μ"Gold
 Contact Plating: G1=3μ"Gold
 G2=5μ"Gold
 G3=10μ"Gold
 G4=15μ"Gold
 G5=30μ"Gold
 S0=Gold Flash/Tin
 S1=3μ"Gold/Tin
 S2=5μ"Gold/Tin
 S3=10μ"Gold/Tin
 S4=15μ"Gold/Tin
 S5=30μ"Gold/Tin
 SN=Tin

Packing: T=Tube
 R=Tray& reel

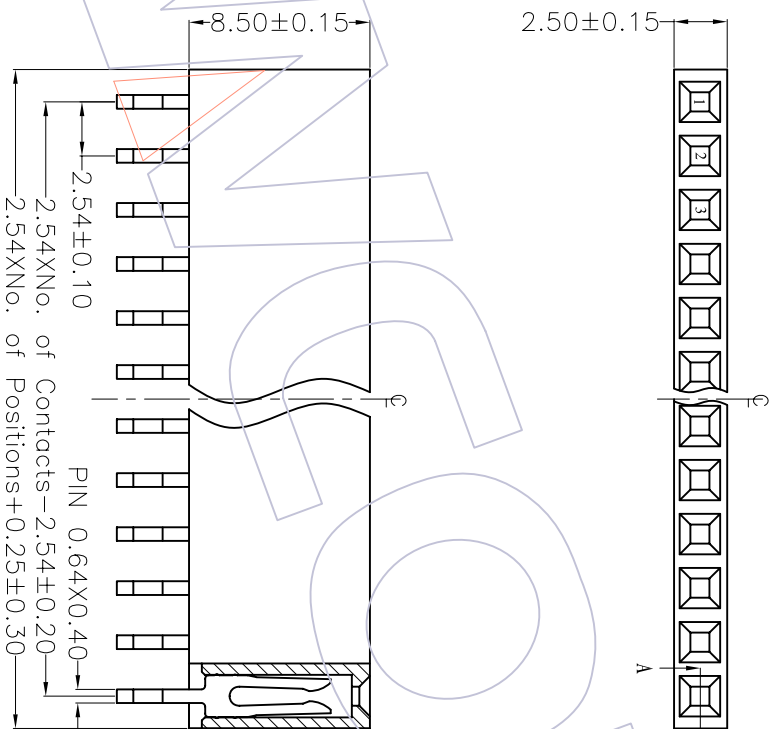

SECTION A-A

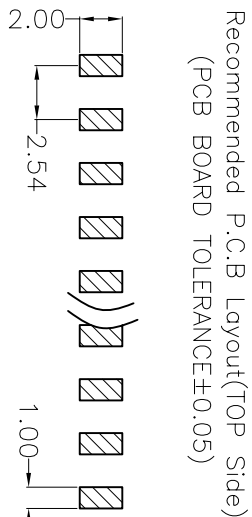

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	WEIXD	SCALE	PART NO.	TITLE:
A0	08/03/13	NEW			XXX ±0.40 XXX ±0.25 XXX ±0.15 Angle ± 3'	DESIGN CHECK	08.03.13	A4 1/1	2185-1XXZXXCYNT1	PH2.54 SINGLE 90° SMT H=8.5
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	APPROVE	PROJ.	Customer NO.		

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO.,LTD