

HSHF

NOTES:





Current Rating: 3.0AMP
 Withstand Voltage: 500V AC/DC
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩMin
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze or Brass
 Contact plating: Au or Sn over Ni
 Insulator Material: PA6T+30%G, F UL94V-0

Ordering Information

2185 - 2 XX M XX C Y N X 1

- No. of Pins per Row: 52-40Pin
- Contact Plating:
 GF=Gold Flash
 G1=3μ"Gold
 G2=50μ"Gold
 G3=10μ"Gold
 G4=15μ"Gold
 G5=30μ"Gold
 S0=Gold Flash/Tin
 S1=3μ"Gold/Tin
 S2=5μ"Gold/Tin
 S3=10μ"Gold/Tin
 S4=15μ"Gold/Tin
 S5=30μ"Gold/Tin
 SN=Tin
- Packaging:
 T=Tube
 P=Tube+CAP
 R=Tray&Reel+CAP

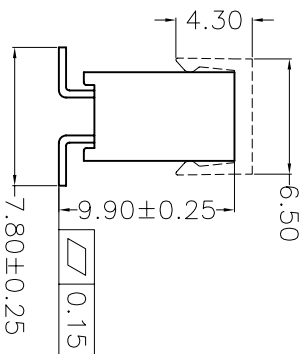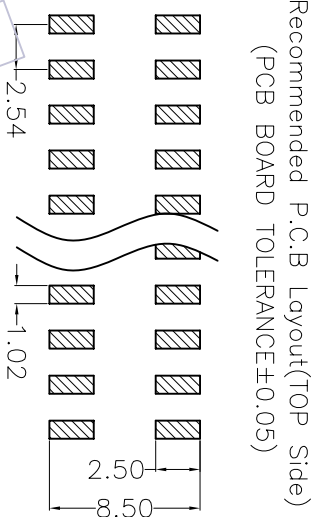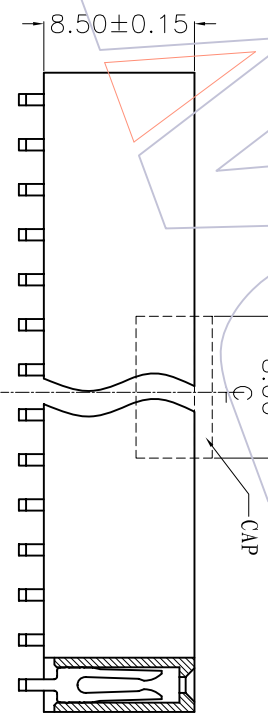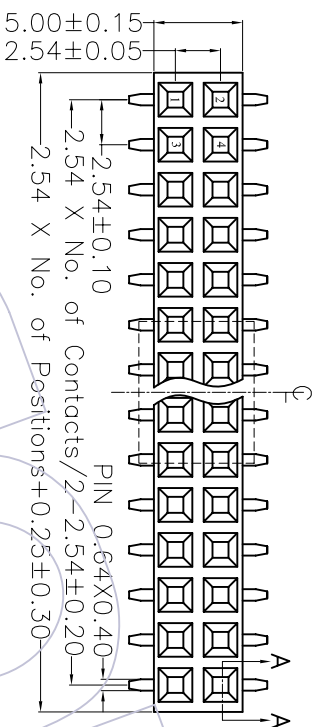

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	WEIXD	SCALE	PART NO.	TITLE:
A0	08/03/13	NEW			XX XXX XXX	DESIGN CHECK	08.03.13	A4 1/1	2185-2XXMXXCYNX1	FH2.54 DUAL SMT H=8.5
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle DIM	CHECK APPROVE		UNIT SIZE		Customer NO.
1					± 3° TOL		2.5:1	mm		

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO.,LTD