
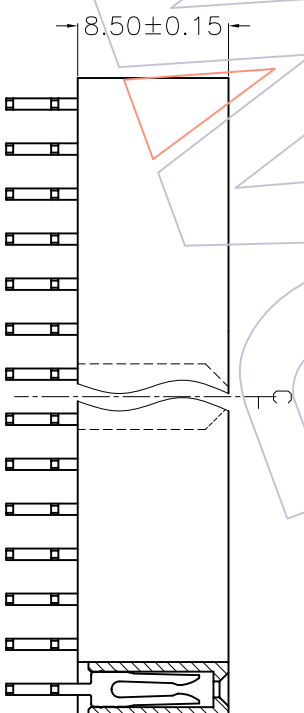

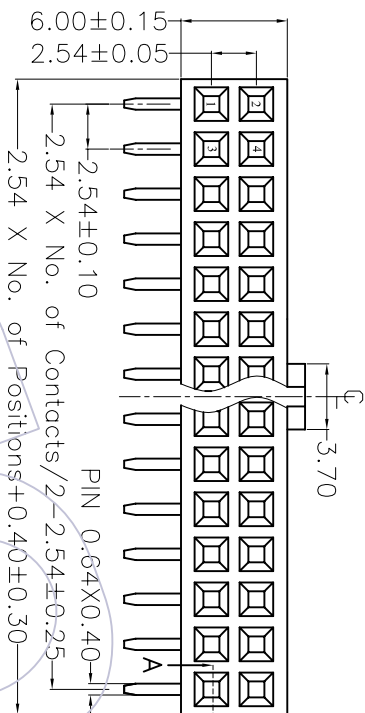


HSP

NOTES:

Current Rating: 3.0AMP
 Withstand Voltage: 500V AC/DC
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩMin
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze or Brass
 Contact plating: Au or Sn over Ni
 Insulator Material: PBT or PA6T+30%G.F UL94V-0

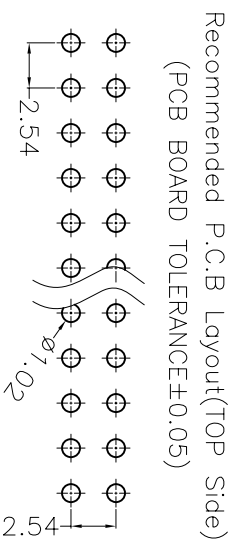

Ordering Information

2185 - 2 XX R XX X YN A X

- No of Pins per ROW: 02-40PIN
- Contact Plating: Insulator: A=PBT T=Tube
- Q=Gold Flash A=PBT
- G1=3µ"Gold C=PA6T
- G2=5µ"Gold
- G3=10µ"Gold
- G4=15µ"Gold
- G5=30µ"Gold
- S0=Gold Flash/Tin
- S1=3µ"Gold/Tin
- S2=5µ"Gold/Tin
- S3=10µ"Gold/Tin
- S4=15µ"Gold/Tin
- S5=30µ"Gold/Tin
- SN=Tin
- Packing: Series No. 3=TYPE 1 4=TYPE 2

TYPE	PART NO.
TYPE 1	2185-2XXXXXXNA3
TYPE 2	2185-2XXXXXXNA4

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO. LTD

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	WEIXD	SCALE	UNIT	PART NO.	TITLE:
A0	08/03/13	NEW			X.X	DESIGN	08.03.13	2.5:1	mm	SEE TABLE	FH2.54 DUAL 90° H=8.50 WITH BUMP
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	CHECK					
					± .3°	APPROVE				Customer NO.	