
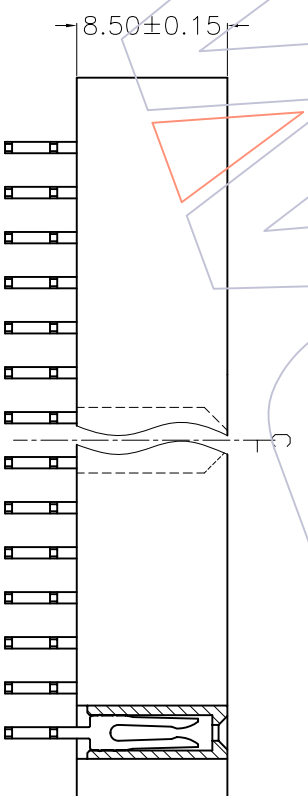
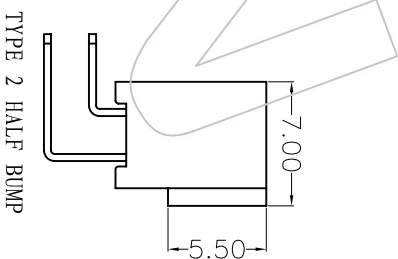
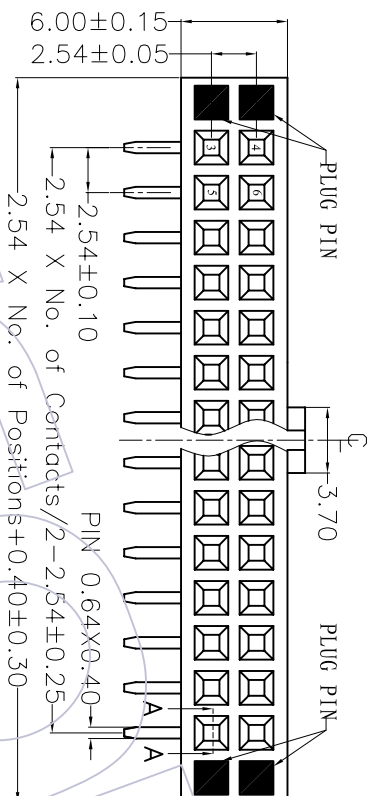


# HSPF

**NOTES:**

Current Rating: 3.0AMP  
 Withstand Voltage: 500V AC/DC  
 Contact Resistance: 20mΩ Max  
 Insulation Resistance: 1000MΩMin  
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze or Brass  
 Contact Plating: Au or Sn over Ni  
 Insulator Material: PBT or PA6T+30%G. F UL94V-0

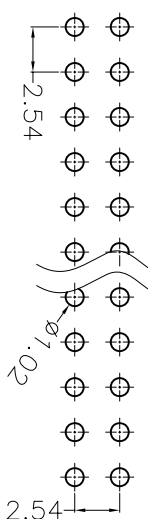

## Ordering Information

2185 - 2 XX R XX X YN A X

No of Pins per Row: 02-40PIN

Contact Plating: Insulator: Packing: Series No.  
 G0=Cold Flash A=PBT T=Tube 5=TYPE 1  
 G1=3µr Gold C=PA6T A=Tray 6=TYPE 2  
 G2=5µr Gold  
 G3=10µr Gold  
 G4=1µr Gold  
 G5=50µr Gold  
 S0=Cold Flash/Tin  
 S1=3µr Gold/Tin  
 S2=5µr Gold/Tin  
 S3=10µr Gold/Tin  
 S4=15µr Gold/Tin  
 S5=50µr Gold/Tin  
 SN=Tin

SECTION: A-A

TYPE	PART NO.
TYPE 1	2185-2XXXXXXNA5
TYPE 2	2185-2XXXXXXNA6

**WCON** 维峰五金电子有限公司  
 WAVE HARDWARE ELECTRONICS CO. LTD

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	WEIXD	08.03.13	SCALE	2.5:1	PART NO.	SEE TABLE
A0	08/03/13	NEW			XXX ±0.40	DESIGN			UNIT	mm		
					XXX ±0.25	CHECK			SIZE	A4	TITLE:	FIG. 54 DUAL 90° H=8.50 WITH BUMP PLUG PIN
					Angle ± 3'	APPROVE			SHEET	1/1	Customer NO.	
					DIM	TOL	PROU.					