

HSHF

NOTES:



Current Rating: 3.0AMP
 Withstand Voltage: 500V AC/DC
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩMin
 Operation Temperature: -40°C to +105°C
 Contact Material: Phosphor Bronze
 Contact plating: Au or Sn over Ni
 Insulator Material: PA6T or PBT+30%G.F UL94V-0

Ordering Information


2185 - 2 XX S XX X UN T 1

Node Pins per ROW:02-40PIN
 Contact Plating: GP=Gold Flash
 GI=3μr/Gold
 G2=5μr/Gold
 G3=10μr/Gold
 G4=15μr/Gold
 G5=30μr/Gold
 S0=Gold Flash/Tin
 S1=3μr/Gold/Tin
 S2=5μr/Gold/Tin
 S3=10μr/Gold/Tin
 S4=15μr/Gold/Tin
 S5=30μr/Gold/Tin
 SN=Tin

Insulator: A=PBT
 C=PA6T
 Packing: T=Tube

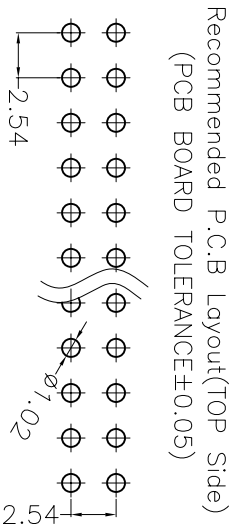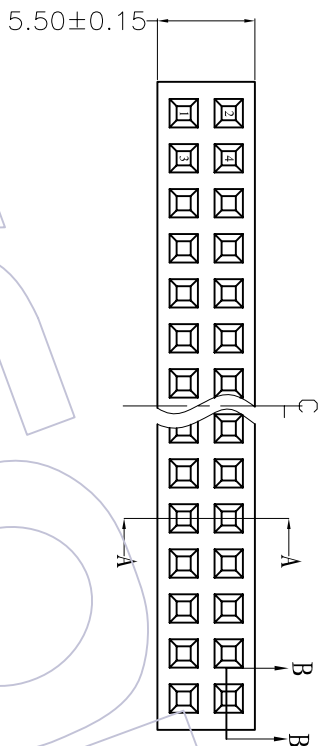

SECTION: B-B



SECTION: A-A

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	WEIXD	SCALE	PART NO.	TITLE:
A0	08/03/12	NEW			XXX ±0.40 XXX ±0.25 XXX ±0.15 Angle ± .3° DIM TOL	DESIGN CHECK APPROVE	08.03.12	2.5:1 mm A4 1/1	2185-2XXSXXXUNT1	FH2.54 DUAL 180° H=8.5
1										

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO.,LTD