


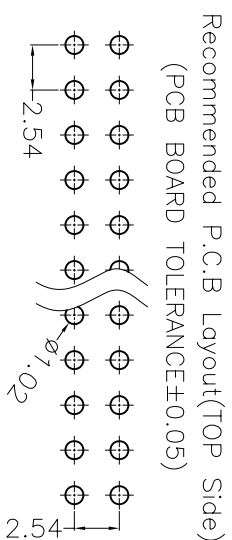
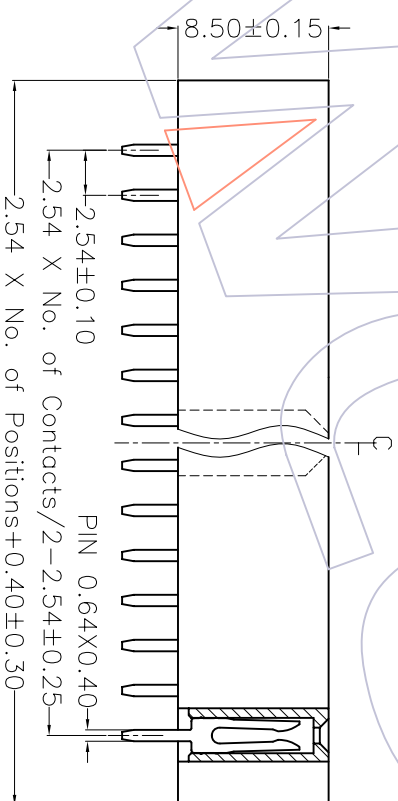


HSP

NOTES:

Current Rating: 3.0AMP
 Withstand Voltage: 500V AC/DC
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩMin
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze or Brass
 Contact plating: Au or Sn over Ni
 Insulator Material: PBT or PA6T+30%G.F UH94V-0

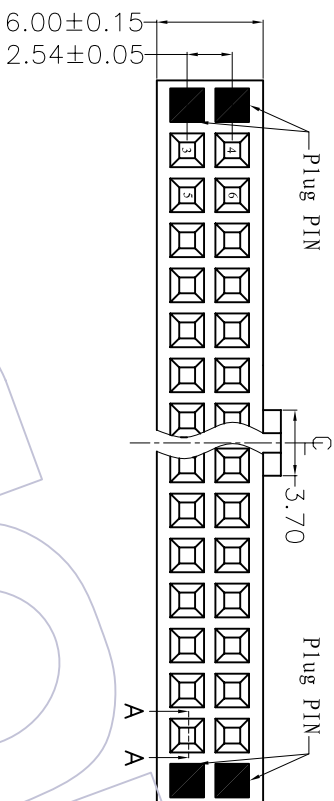

Ordering Information

2185 - 2 XX S XX X YN A X

No of Pins per ROW: 02-40PIN

Contact Plating: G=Gold Flash
 G1=3µ Gold
 G2=50µ Gold
 G3=10µ Gold
 G4=15µ Gold
 G5=30µ Gold
 S0=Gold Flash/Tin
 S1=3µ Gold/Tin
 S2=5µ Gold/Tin
 S3=10µ Gold/Tin
 S4=15µ Gold/Tin
 S5=30µ Gold/Tin
 SN=Tin

Insulator: A=PBT C=PA6T

Packing: T=tube A=Tray

Series No. S=TYPE 1 6=TYPE 2

SECTION: A-A

TYPE	PART NO.
TYPE 1	2185-2XXXSXXYYNA5
TYPE 2	2185-2XXXSXXYYNA6

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	WEIXD	SCALE	PART NO.	SEE TABLE
A0	08/03/13	NEW			XXX ±0.40 XXX ±0.25 XXX ±0.15	DESIGN CHECK		3:1 mm A4		FI2.54 DUAL 180° H=8.50 WITH BUMP Plug pin
					Angle ± 3'	CHECK		1/1		
					DIM TOL	APPROVE		PROJ.	Customer NO.	

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO. LTD