
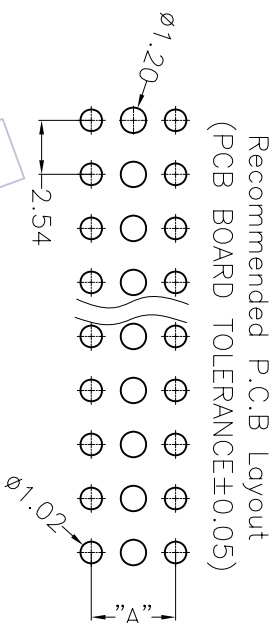


HSP

NOTES:

Current Rating: 3.0AMP
 Withstand Voltage: 500V AC/DC
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ/Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au or Sn over Ni
 Insulator Material: LCP+30%G.F.(UL94V-0)


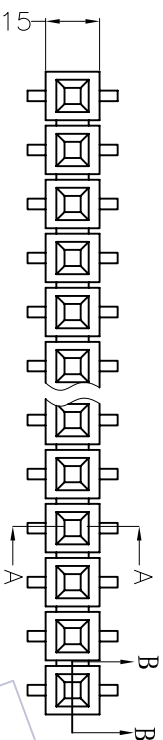


Ordering Information

2185E - 1 XX W XX D U N T X

No. of Pins per ROW: 02-40PIN

Contact Plating:
 G0=Gold Flash
 G1=3μ"Gold
 G2=5μ"Gold
 G3=10μ"Gold
 G4=15μ"Gold
 G5=30μ"Gold
 S0=Gold Flash/Tin
 S1=5μ"Gold/Tin
 S2=5μ"Gold/Tin
 S3=10μ"Gold/Tin
 S4=15μ"Gold/Tin
 S5=30μ"Gold/Tin
 SN=Tin

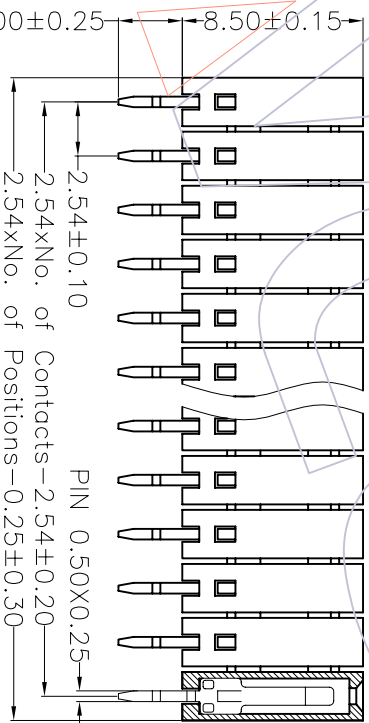

SECTION: B-B

TITLE (DIM: A)	PART NO.
1=3.17	2185E-1XXWXXDUNT1
2=3.96	2185E-1XXWXXDUNT2
3=5.08	2185E-1XXWXXDUNT3

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO. LTD

SEE TABLE

PH2.54 SINGLE H=8.5 Provision Broken

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
A1	08/06/11	Changing P.C.B Layout		
A0	08/03/12	NEW		

OPERATION		DRAW		SCALE		PART NO.	
XX	±0.40	WEIXD	08.06.11	3:1	UNIT	mm	
XXX	±0.25	DESIGN			SIZE	A4	
XXXX	±0.15	CHECK			SHEET	1/1	TITLE:
Angle	± 3'	APPROVE			PROJ.		Customer NO.
DIM	TOL						